

- Imagination is more important than knowledge
- Everything should be made as simple as possible, but not simpler.


Albert Einstein

# RIGID BODY DYNAMICS




## 1. RIGID BODY :


Rigid body is defined as a system of particles in which distance between each pair of particles remains constant (with respect to time). Remember, rigid body is a mathematical concept and any system which satisfies the above condition is said to be rigid as long as it satisfies it.

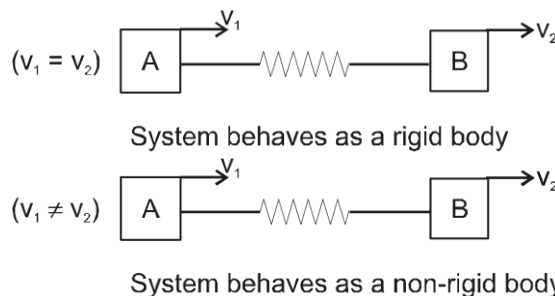

A & B are beads which move on a circular fixed ring

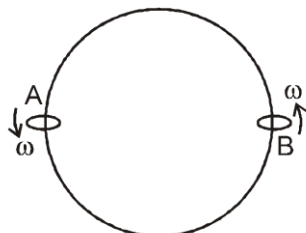

A + B is a rigid body system  
but A + B + ring is non-rigid system

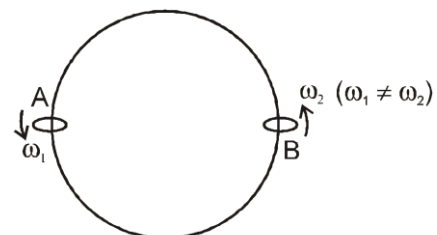

A + B is non-rigid system

- If a system is rigid, since there is no change in the distance between any pair of particles of the system, shape and size of system remains constant. Hence we intuitively feel that while a stone or cricket ball are rigid bodies, a balloon or elastic string is non rigid. But any of the above system is rigid as long as relative distance does not change, whether it is a cricket ball or a balloon. But at the moment when the bat hits the cricket ball or if the balloon is squeezed, relative distance changes and now the system behaves like a non-rigid system.
- For every pair of particles in a rigid body, there is no velocity of separation or approach between the particles. i.e. any relative motion of a point B on a rigid body with respect to another point A on the rigid body will be perpendicular to line joining A to B, hence with respect to any particle A of a rigid body the motion of any other particle B of that rigid body is circular motion.

## Rigid Body Dynamics

Let velocities of A and B with respect ground be  $\vec{V}_A$  and  $\vec{V}_B$  respectively in the figure below.



If the above body is rigid  $V_A \cos \theta_1 = V_B \cos \theta_2$  (velocity of approach / separation is zero)


$V_{BA}$  = relative velocity of B with respect to A.

$V_{BA} = V_A \sin \theta_1 + V_B \sin \theta_2$  (which is perpendicular to line AB)

B will appear to move in a circle to an observer fixed at A.

W.r.t. any point of the rigid body the angular velocity of all other points of the rigid body is same.


Suppose A, B, C is a rigid system hence during any motion sides AB, BC and CA must rotate through the same angle. Hence all the sides rotate by the same rate.

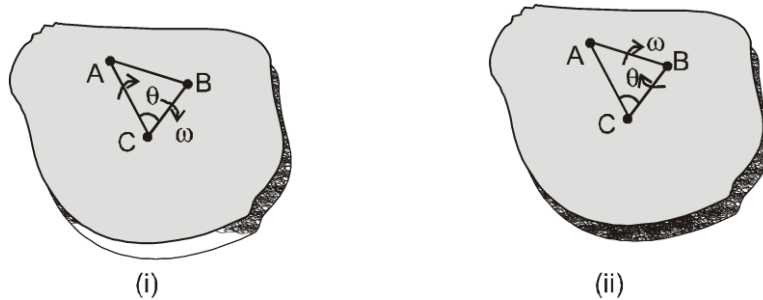

From figure (i) angular velocity of A and B w.r.t. C is  $\omega$ ,

From figure (ii) angular velocity of A and C w.r.t. B is  $\omega$ ,


### Types of Motion of rigid body

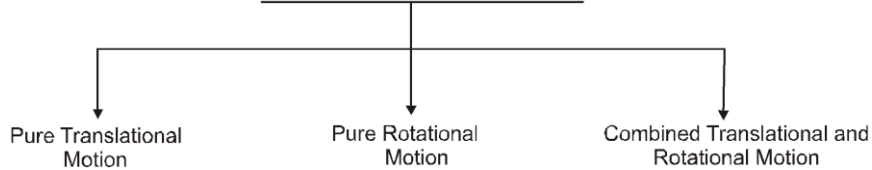

## I. Pure Translational Motion :

A body is said to be in pure translational motion, if the displacement of each particle of the system is same during any time interval. During such a motion, all the particles have same displacement ( $\vec{s}$ ), velocity ( $\vec{v}$ ) and acceleration ( $\vec{a}$ ) at an instant.

Consider a system of n particle of mass  $m_1, m_2, m_3, \dots, m_n$  undergoing pure translation. then from above definition of translational motion

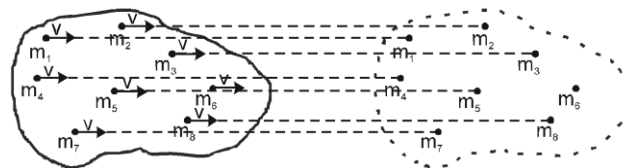

$$\vec{a}_1 = \vec{a}_2 = \vec{a}_3 = \dots \vec{a}_n = \vec{a} \text{ (say)}$$

and  $\vec{v}_1 = \vec{v}_2 = \vec{v}_3 = \dots \vec{v}_n = \vec{v} \text{ (say)}$

From newton's laws for a system.

$$\vec{F}_{\text{ext}} = m_1 \vec{a}_1 + m_2 \vec{a}_2 + m_3 \vec{a}_3 + \dots$$

$$\vec{F}_{\text{ext}} = M \vec{a}$$

Where  $M$  = Total mass of the body

$$\vec{P} = m_1 \vec{v}_1 + m_2 \vec{v}_2 + m_3 \vec{v}_3 + \dots$$

$$\vec{P} = M \vec{v}$$

$$\text{Total Kinetic Energy of body} = \frac{1}{2} m_1 v_1^2 + \frac{1}{2} m_2 v_2^2 + \dots = \frac{1}{2} M v^2$$

## II. Pure Rotational Motion :

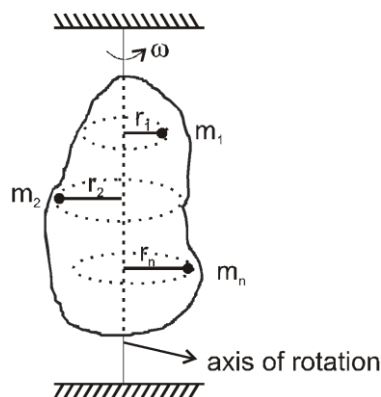


Figure shows a rigid body of arbitrary shape in rotation about a fixed axis, called the axis of rotation. Every point of the body moves in a circle whose center lies on the axis of rotation, and every point moves through the same angle during a particular time interval. Such a motion is called pure rotation.

We know that each particle has same angular velocity (since the body is rigid.)

SO,  $v_1 = \omega r_1$ ,  $v_2 = \omega r_2$ ,  $v_3 = \omega r_3$  .....  $v_n = \omega r_n$

$$\text{Total Kinetic Energy} = \frac{1}{2} m_1 v_1^2 + \frac{1}{2} m_2 v_2^2 + \dots$$

$$= \frac{1}{2} [m_1 r_1^2 + m_2 r_2^2 + \dots] \omega^2$$

$$= \frac{1}{2} I \omega^2 \text{ Where } I = m_1 r_1^2 + m_2 r_2^2 + \dots \text{ (is called moment of inertia)}$$

$\omega$  = angular speed of body.

## III. Combined Translational and Rotational Motion :

A body is said to be in combined translation and rotational motion if all point in the body rotates about an axis of rotation and the axis of rotation moves with respect to the ground. Any general motion of a rigid body can be viewed as a combined translational and rotational motion.

## IV. COMPARISON OF LINEAR MOTION AND ROTATIONAL MOTION

### Linear Motion

- (i) If acceleration is 0,  $v$  = constant and  $s = vt$
- (ii) If acceleration  $a$  = constant,

$$(i) \quad s = \frac{(u + v)}{2} t$$

### Rotational Motion

- (i) If acceleration is 0,  $\omega$  = constant and  $\theta = \omega t$
- (ii) If acceleration  $\alpha$  = constant then

$$(i) \quad \theta = \frac{(\omega_1 + \omega_2)}{2} t$$

$$(ii) a = \frac{v - u}{t}$$

$$(iii) v = u + at$$

$$(iv) s = ut + (1/2) at^2$$

$$(v) v^2 = u^2 + 2as$$

$$(vi) S_{nth} = u + a(2n - 1)/2$$

(iii) If acceleration is not constant, the above equation will not be applicable. In this case

$$(i) v = \frac{dx}{dt}$$

$$(ii) a = \frac{dv}{dt} = \frac{d^2x}{dt^2}$$

$$(iii) vdv = ads$$

$$(ii) \alpha = \frac{\omega_2 - \omega_1}{t}$$

$$(iii) \omega_2 = \omega_1 + \alpha t$$

$$(iv) \theta = \omega_1 t + 1/2 \alpha t^2$$

$$(v) \omega_2^2 = \omega_1^2 + 2 \alpha \theta$$

$$(vi) \theta_{nth} = \omega_1 + (2n - 1)\alpha/2$$

(iii) If acceleration is not constant, the above equation will not be applicable. In this case

$$(i) \omega = \frac{d\theta}{dt}$$

$$(ii) \alpha = \frac{d\omega}{dt} = \frac{d^2\theta}{dt^2}$$

$$(iii) \omega d\omega = \alpha d\theta$$

## Solved Examples

**Example 1.** A bucket is being lowered down into a well through a rope passing over a fixed pulley of radius 10 cm. Assume that the rope does not slip on the pulley. Find the angular velocity and angular acceleration of the pulley at an instant when the bucket is going down at a speed of 20 cm/s and has an acceleration of 4.0 m/s<sup>2</sup>.

**Solution :** Since the rope does not slip on the pulley, the linear speed  $v$  of the rim of the pulley is same as the speed of the bucket.

$$\text{The angular velocity of the pulley is then } \omega = v/r = \frac{20 \text{ cm/s}}{10 \text{ cm}} = 2 \text{ rad/s}$$

$$\text{and the angular acceleration of the pulley is } \alpha = a/r = \frac{4.0 \text{ m/s}^2}{10 \text{ cm}} = 40 \text{ rad/s}^2.$$

**Example 2.** A wheel rotates with a constant angular acceleration of 2.0 rad/s<sup>2</sup>. If the wheel starts from rest, how many revolutions will it make in the first 10 seconds?

**Solution :** The angular displacement in the first 10 seconds is given by

$$\theta = \omega_0 t + \frac{1}{2} \alpha t^2 = \frac{1}{2} (2.0 \text{ rad/s}^2) (10 \text{ s})^2 = 100 \text{ rad.}$$

As the wheel turns by  $2\pi$  radian in each revolution, the number of revolutions in 10 s is

$$n = \frac{100}{2\pi} = 16$$

**Example 3.** The wheel of a motor, accelerated uniformly from rest, rotates through 2.5 radian during the first second. Find the angle rotated during the next second.

**Solution :** As the angular acceleration is constant, we have

$$\theta = \omega_0 t + \frac{1}{2} \alpha t^2 = \frac{1}{2} \alpha t^2.$$

$$\text{Thus, } 2.5 \text{ rad} = \frac{1}{2} \alpha (1 \text{ s})^2$$

$$\alpha = 5 \text{ rad/s}^2 \quad \text{or} \quad \alpha = 5 \text{ rad/s}^2$$

The angle rotated during the first two seconds is  $= \frac{1}{2} \times (5 \text{ rad/s}^2) (2 \text{ s})^2 = 10 \text{ rad.}$   
Thus, the angle rotated during the 2<sup>nd</sup> second is  $10 \text{ rad} - 2.5 \text{ rad} = 7.5 \text{ rad.}$

**Example 4.** Starting from rest, a fan takes five seconds to attain the maximum speed of 400 rpm (revolution per minute). Assuming constant acceleration, find the time taken by the fan in attaining half the maximum speed.

**Solution :** Let the angular acceleration be  $\alpha$ . According to the question,

$$400 \text{ rev/min} = 0 + \alpha 5 \quad \dots\dots\dots(i)$$

Let  $t$  be the time taken in attaining the speed of 200 rev/min which is half the maximum.

Then,  $200 \text{ rev/min} = 0 + \alpha t$  .....(ii)

Dividing (i) by (ii), we get,

$$2 = 5t \quad \text{or} \quad t = 2.5 \text{ s.}$$

**Example 5.** The motor of an engine is rotating about its axis with an angular velocity of 100 rev/minute. It comes to rest in 15 s, after being switched off. Assuming constant angular deceleration, calculate the number of revolutions made by it before coming to rest.

**Solution :** The initial angular velocity = 100 rev/minute =  $(10\pi/3) \text{ rad/s}$ .

Final angular velocity = 0.

Time interval = 15 s.

Let the angular acceleration be  $\alpha$ . Using the equation  $\omega = \omega_0 + \alpha t$ , we obtain

$$\alpha = (-2\pi/9) \text{ rad/s}^2$$

The angle rotated by the motor during this motion is

$$\theta = \frac{1}{2} \omega_0 t + \alpha t^2 = \frac{1}{2} \left( \frac{10\pi \text{ rad}}{3 \text{ s}} \right) (15\text{s}) - \frac{1}{2} \left( \frac{2\pi \text{ rad}}{9 \text{ s}^2} \right) (15\text{s})^2 = 25\pi \text{ rad} = 12.5 \text{ revolutions.}$$

Hence the motor rotates through 12.5 revolutions before coming to rest.



## 2. MOMENT OF INERTIA (I) ABOUT AN AXIS :


(i) Moment of inertia of a system of  $n$  particles about an axis is defined as :

$$I = m_1 r_1^2 + m_2 r_2^2 + \dots + m_n r_n^2$$

$$I = \sum_{i=1}^n m_i r_i^2$$

i.e.

where,  $r_i$  = It is perpendicular distance of mass  $m_i$  from axis of rotation SI units of Moment of Inertia is  $\text{Kgm}^2$ . Moment of inertia is a scalar positive quantity.

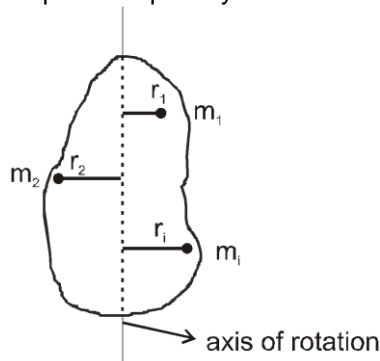

(ii) For a continuous system :

$$I = \int r^2 (dm)$$

where  $dm$  = mass of a small element

$r$  = perpendicular distance of the mass element  $dm$  from the axis

**Moment of Inertia depends on :**

- (i) density of the material of body
- (ii) shape & size of body
- (iii) axis of rotation

In totality we can say that it depends upon distribution of mass relative to axis of rotation.


**Note : •** Moment of inertia does not change if the mass :

(i) is shifted parallel to the axis of the rotation because  $r_i$  does not change.

(ii) is rotated about axis of rotation in a circular path because  $r_i$  does not change.

## Solved Examples

**Example 6.** Two particles having masses  $m_1$  &  $m_2$  are situated in a plane perpendicular to line AB at a distance of  $r_1$  and  $r_2$  respectively as shown.

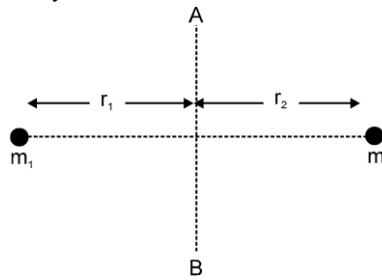

- (i) Find the moment of inertia of the system about axis AB ?
- (ii) Find the moment of inertia of the system about an axis passing through  $m_1$  and perpendicular to the line joining  $m_1$  and  $m_2$  ?
- (iii) Find the the moment of inertia of the system about an axis passing through  $m_1$  and  $m_2$  ?
- (iv) Find moment of inertia about axis passing through centre of mass and perpendicular to line joining  $m_1$  and  $m_2$

**Solution :**

- (i) Moment of inertia of particle on left is  $I_1 = m_1 r_1^2$ .  
 Moment of Inertia of particle on right is  $I_2 = m_2 r_2^2$ .  
 Moment of Inertia of the system about AB is  $I = I_1 + I_2 = m_1 r_1^2 + m_2 r_2^2$
- (ii) Moment of inertia of particle on left is  $I_1 = 0$   
 Moment of Inertia of particle on right is  $I_2 = m_2 (r_1 + r_2)^2$ .  
 Moment of Inertia of the system about AB is  $I = I_1 + I_2 = 0 + m_2 (r_1 + r_2)^2$
- (iii) Moment of inertia of particle on left is  $I_1 = 0$   
 Moment of Inertia of particle on right is  $I_2 = 0$   
 Moment of Inertia of the system about AB is  $I = I_1 + I_2 = 0 + 0$
- (iv) Centre of mass of system  $r_{CM} = \frac{m_2 \left( \frac{r_1 + r_2}{m_1 + m_2} \right)}{m_1 \left( \frac{r_1 + r_2}{m_1 + m_2} \right)} = \text{Distance of centre mas from mass } m_1$


$$\text{Distance of centre of mass from mass } m_2 = m_1 \left( \frac{r_1 + r_2}{m_1 + m_2} \right)$$

So moment of inertia about centre of mass

$$I_{cm} = m_1 \left( m_2 \frac{r_1 + r_2}{m_1 + m_2} \right)^2 + m_2 \left( m_1 \frac{r_1 + r_2}{m_1 + m_2} \right)^2$$

$$I_{CM} = \frac{m_1 m_2}{m_1 + m_2} (r_1 + r_2)^2$$


**Example 7.** Four particles each of mass  $m$  are kept at the four corners of a square of edge  $a$ . Find the moment of inertia of the system about a line perpendicular to the plane of the square and passing through the centre of the square.



**Solution :** The perpendicular distance of every particle from the given line is  $a/\sqrt{2}$ . The moment of inertia

of one particle is, therefore,  $m(a/\sqrt{2})^2 = \frac{1}{2} ma^2$ . The moment of inertia of the system is, therefore,  
 $4 \times \frac{1}{2} ma^2 = 2ma^2$ .

**Example 8.** Three particles, each of mass  $m$ , are situated at the vertices of an equilateral triangle ABC of side  $L$  (figure). Find the moment of inertia of the system about



- (i) the line AX perpendicular to AB in the plane of ABC.
- (ii) One of the sides of the triangle ABC
- (iii) About an axis passing through the centroid and perpendicular to plane of the triangle ABC.

**Solution :**

- (i) Perpendicular distance of A from AX = 0

Perpendicular distance of B from AX =  $L$

Perpendicular distance of C from AX =  $L/2$

Thus, the moment of inertia of the particle at A = 0, of the particle at B =  $mL^2$ , and of the particle at C =  $m(L/2)^2$ . The moment of inertia of the three-particle system about AX is

$$0 + mL^2 + m(L/2)^2 = \frac{5mL^2}{4}$$

Note that the particles on the axis do not contribute to the moment of inertia.


- (ii) Moment of inertia about the side AC = mass of particle B  $\times$  square of perpendicular distance

$$\text{of B from side AC, } I_{AC} = m \left( \frac{\sqrt{3}}{2}L \right)^2 = \frac{3mL^2}{4}$$

- (iii) Distance of centroid from all the particle is  $\frac{L}{\sqrt{3}}$ , so moment of inertia about an axis and passing through the centroid perpendicular plane of triangle

$$I_{ABC} = I_C = 3m \left( \frac{L}{\sqrt{3}} \right)^2 = mL^2$$

**Example 9.** Calculate the moment of inertia of a ring having mass  $M$ , radius  $R$  and having uniform mass distribution about an axis passing through the centre of ring and perpendicular to the plane of ring ?



**Solution :**  $I = \int (dm)r^2$


Because each element is equally distanced from the axis so  $r = R$

$$= R^2 \int dm = MR^2$$

$$I = MR^2$$

**(Note :** Answer will remain same even if the mass is nonuniformly distributed because  $\int dm = M$  always.)

**Example 10.** Four point masses are connected by a massless rod as shown in figure. Find out the moment of inertia of the system about axis CD ?

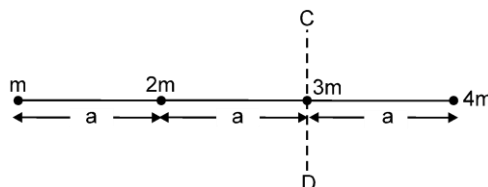

**Solution :**

$$I_1 = m(2a)^2$$


$$I_2 = 2ma^2$$

$$I_3 = 0$$

$$I_4 = 4ma^2$$

$$I_{CD} = I_1 + I_2 + I_3 + I_4 = 10 ma^2 \quad \text{Ans.}$$

**Example 11.** Three point masses are located at the corners of an equilibrium triangle of side 1 cm. Masses are of 1, 2, & 3 kg respectively and kept as shown in figure. Calculate the moment of Inertia of system about an axis passing through 1 kg mass and perpendicular to the plane of triangle ?



**Solution :** Moment of inertia of 2 kg mass about an axis passing through 1 kg mass



$$I_1 = 2 \times (1 \times 10^{-2})^2 = 2 \times 10^{-4}$$

Moment of inertia of 3 kg mass about an axis passing through 1 kg mass

$$I_2 = 3 \times (1 \times 10^{-2})^2 = 3 \times 10^{-4}$$

$$I = I_1 + I_2 = 5 \times 10^{-4} \text{ kgm}^2$$

**Example 12.** Calculate the moment of inertia of a uniform rod of mass  $M$  and length  $\ell$  about an axis 1, 2, 3 and 4.

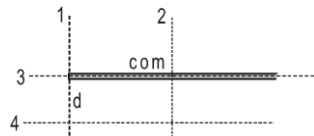

**Solution**


$$(I_1) = \int (dm)r^2 = \int_0^\ell \left(\frac{M}{\ell} dx\right) x^2 = \frac{M\ell^2}{3}$$

$$(I_2) = \int (dm)r^2 = \int_{-\ell/2}^{\ell/2} \left(\frac{M}{\ell} dx\right) x^2 = \frac{M\ell^2}{12}$$

$$(I_3) = 0 \text{ (axis 3 passing through the axis of rod)}$$


$$(I_4) = d^2 \int (dm) = Md^2$$

**Example 13.** Determine the moment of inertia of a uniform rectangular plate of mass, side 'b' and ' $\ell$ ' about an axis passing through the edge 'b' and in the plane of plate.




**Solution :** Each section of  $dm$  mass rod in the rectangular plate has moment of inertia about an axis passing

$$\text{through edge 'b' } dI = \frac{dm \ell^2}{3}$$



$$\text{So } I = \int dI = \frac{\ell^2}{3} \int dm = \frac{M \ell^2}{3}$$

**Example 14.** Find out the moment of Inertia of figures shown each having mass  $M$ , radius  $R$  and having uniform mass distribution about an axis passing through the centre and perpendicular to the plane ?

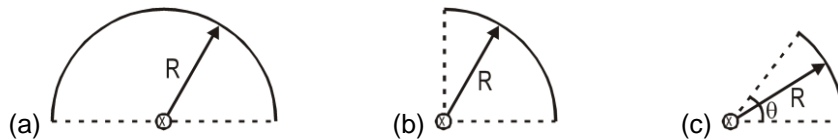

**Solution :**  $MR^2$  (infact M.I. of any part of mass  $M$  of a ring of radius  $R$  about axis passing through geometrical centre and perpendicular to the plane of the ring is  $= MR^2$ )



(iii) **Moment of inertia of a large object can be calculated by integrating M.I. of an element of the object:**

$$I = \int dI_{\text{element}}$$


where  $dI$  = moment of inertia of a small element

**Element chosen should be such that :** either perpendicular distance of axis from each point of the element is same or the moment of inertia of the element about the axis of rotation is known.

## Solved Examples

**Example 15.** Determine the moment of Inertia of a uniform disc having mass  $M$ , radius  $R$  about an axis passing through centre & perpendicular to the plane of disc ?

**Solution :**  $I = \int dI_{\text{ring}}$   
element - ring  $dI = dmr^2$

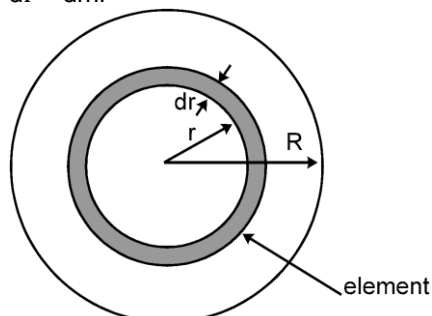


$$dm = \frac{M}{\pi R^2} 2\pi r dr \text{ (here we have used the uniform mass distribution)}$$

$$\therefore I = \int_0^R \frac{M}{\pi R^2} \cdot (2\pi r dr) \cdot r^2 \Rightarrow I = \frac{MR^2}{2}$$

**Example 16.** Calculate the moment of inertia of a uniform hollow cylinder of mass  $M$ , radius  $R$  and length  $\ell$  about its axis.

**Solution :** Moment of inertia of a uniform hollow cylinder is

$$I = \int (dm)R^2 = mR^2$$

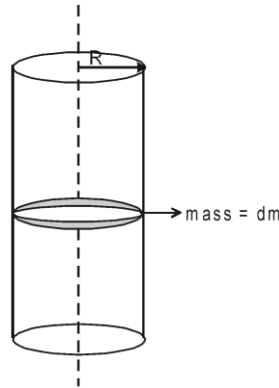


### 3. TWO IMPORTANT THEOREMS ON MOMENT OF INERTIA

(i) **Perpendicular Axis Theorem** [Only applicable to plane laminar bodies (i.e. for 2-dimensional objects only)].

If axis 1 & 2 are in the plane of the body and perpendicular to each other.

Axis 3 is perpendicular to plane of 1 & 2 .

Then,  $I_3 = I_1 + I_2$

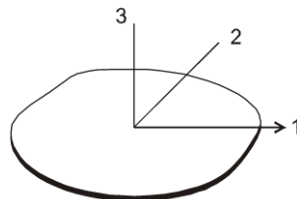


Body is in 1-2 plane



The point of intersection of the three axis need not be center of mass, it can be any point in the plane of body which lies on the body or even outside it.

### Solved Examples

**Example 17.** Find the moment of inertia of a uniform ring of mass  $M$  and radius  $R$  about a diameter.




**Solution :** Let AB and CD be two mutually perpendicular diameters of the ring. Take them as X and Y-axes and the line perpendicular to the plane of the ring through the centre as the Z-axis. The moment of inertia of the ring about the Z-axis is  $I = MR^2$ . As the ring is uniform, all of its diameters are equivalent and so  $I_x = I_y$ . From perpendicular axes theorem,

$$I_z = I_x + I_y. \quad \text{Hence } I_x = \frac{I_z}{2} = \frac{MR^2}{2}$$

Similarly, the moment of inertia of a uniform disc about a diameter is  $MR^2/4$ .

**Example 18.** Two uniform identical rods each of mass  $M$  and length  $\ell$  are joined to form a cross as shown in figure. Find the moment of



inertia of the cross about a bisector as shown dotted in the figure.


**Solution :** Consider the line perpendicular to the plane of the figure through the centre of the cross. The

moment of inertia of each rod about this line is  $\frac{M\ell^2}{12}$  and hence the moment of inertia of the cross

is  $\frac{M\ell^2}{6}$ . The moment of inertia of the cross about the two bisectors are equal by symmetry and according to the theorem of perpendicular axes, the moment of inertia of the cross about the

bisector is  $\frac{M\ell^2}{12}$ .

**Example 19.** In the figure shown find moment of inertia of a plate having mass  $M$ , length  $\ell$  and width  $b$  about axis 1, 2, 3 and 4. Assume that mass is uniformly distributed.

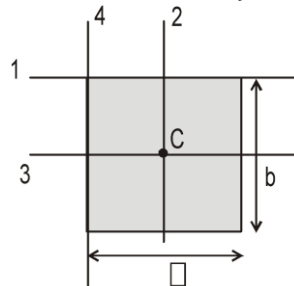

**Solution :** Moment of inertia of the plate about axis 1 (by taking rods perpendicular to axis 1)

$$I_1 = Mb^2 / 3$$

Moment of inertia of the plate about axis 2 (by taking rods perpendicular to axis 2)

$$I_2 = M\ell^2 / 12$$


Moment of inertia of the plate about axis 3 (by taking rods perpendicular to axis 3)

$$I_3 = Mb^2 / 12$$

Moment of inertia of the plate about axis 4 (by taking rods perpendicular to axis 4)

$$I_4 = M\ell^2 / 3$$

**Example 20.** In the figure shown find the moment of inertia of square plate having mass  $m$  and sides  $a$ . About an axis 2 passing through point  $C$  (centre of mass) and in the plane of plate.

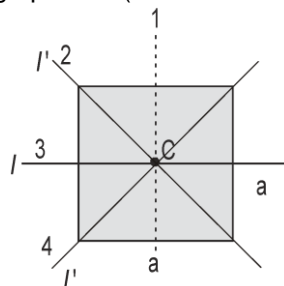

**Solution :** Using perpendicular axis theorems  $I_C = I_4 + I_2 = 2I'$

Using perpendicular theorems  $I_C = I_3 + I_1 = I + I = 2I$

$$2I' = 2I$$

$$I' = I$$

$$IC = 2I = \frac{ma^2}{6} \Rightarrow I' = \frac{ma^2}{12}$$


**Example 21.** Find the moment of Inertia of a uniform disc of mass  $M$  and radius  $R$  about a diameter.  
**Solution :** Consider  $x$  &  $y$  two mutually perpendicular diameters of the ring.

$$I_x + I_y = I_z$$




$$I_x = I_y \text{ (due to symmetry)}$$

$$I_z = \frac{MR^2}{2}$$

$$I_x = I_y = \frac{MR^2}{4}$$

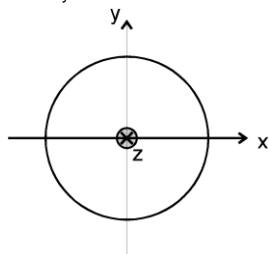

**Example 22.** Calculate the moment of Inertia of figure shown each having mass  $M$ , radius  $R$  and having uniform mass distribution about an axis perpendicular to the plane and passing through centre?

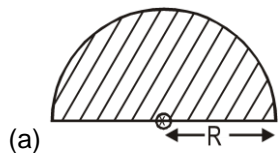


**Solution :**

$$dI = dm \frac{R^2}{2}$$

$$I = \frac{R^2}{2} = \frac{MR^2}{2}$$


**Example 23.** Calculate the moment of inertia of a uniform solid cylinder of mass  $M$ , radius  $R$  and length  $\ell$  about its axis.

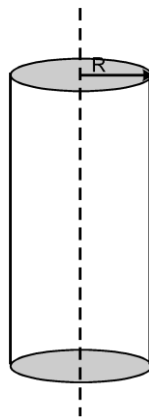

**Solution.** Each segment of cylinder is solid disc so  $\int dl = \int dm \frac{R^2}{2}$   
 $I = \frac{MR^2}{2}$  **Ans.**



**(ii) Parallel Axis Theorem (Applicable to planer as well as 3 dimensional objects):**

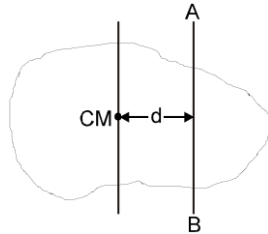

If  $I_{AB}$  = Moment of Inertia of the object about axis AB  
 $I_{cm}$  = Moment of Inertia of the object about an axis  
 passing through centre of mass and parallel to axis AB

$M$  = Total mass of object


$d$  = perpendicular distance between axis AB about which  
 moment of Inertia is to be calculated & the one passing through the centre of mass and  
 parallel to it.

$$I_{AB} = I_{cm} + Md^2$$

## Solved Examples

**Example 24.** Find out relation between  $I_1$  and  $I_2$ .

$I_1$  and  $I_2$  moment of inertia of a rigid body mass  $m$  about an axis as shown in figure.

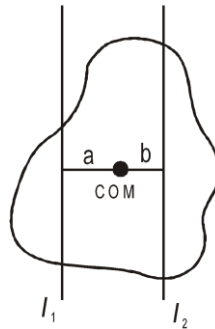

**Solution :** Using parallel axis theorem  $I_1 = I_c + ma^2$  ..... (1)  
 $I_2 = I_c + mb^2$  ..... (2)  
 From (1) and (2)  $I_1 - I_2 = m(a^2 - b^2)$

**Example 25.** Find the moment of inertia of a uniform sphere of mass  $m$  and radius  $R$  about a tangent if the  
 spheres (i) solid (ii) hollow

**Solution** (i) Using parallel axis theorem  $I = I_{CM} + md^2$

for solid sphere  $I_{CM} = \frac{2}{5} mR^2$ ,  $d = R$

$$I = \frac{7}{5} mR^2$$


(ii) Using parallel axis theorem

$$I = I_{CM} + md^2$$

for hollow sphere

$$I_{CM} = \frac{2}{3} mR^2, \quad d = R$$

$$I = \frac{5}{3} mR^2$$

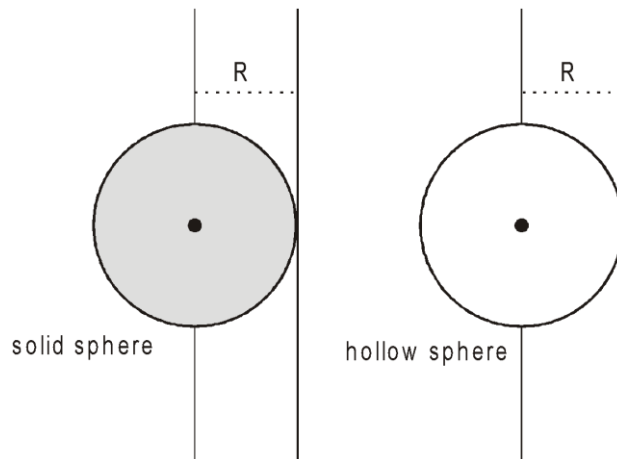

**Example 26.** Find the moment of inertia of a solid cylinder of mass  $M$  and radius  $R$  about a line parallel to the axis of the cylinder and on the surface of the cylinder.

**Solution :** The moment of inertia of the cylinder about its axis =  $\frac{MR^2}{2}$

Using parallel axes theorem,  $I = I_0 + MR^2 = \frac{MR^2}{2} + MR^2 = \frac{3}{2} MR^2$ .

Similarly, the moment of inertia of a solid sphere about a tangent is  $\frac{2}{5} MR^2 + \frac{7}{5} MR^2 = MR^2$ .

**Example 27.** Find out the moment of inertia of a semi circular disc about an axis passing through its centre of mass and perpendicular to the plane?


**Solution :** Moment of inertia of a semi circular disc about an axis passing through centre and perpendicular

to plane of disc,  $I = \frac{MR^2}{2}$ .

Using parallel axis theorem  $I = I_{CM} + Md^2$ ,  $d$  is the perpendicular distance between two parallel axis passing through centre  $C$  and COM.

$$I = \frac{MR^2}{2}, \quad d = \frac{4R}{3\pi} \Rightarrow \frac{MR^2}{2} = I_{CM} + M \left( \frac{4R}{3\pi} \right)^2 \Rightarrow I_{CM} = \left[ \frac{MR^2}{2} - M \left( \frac{4R}{3\pi} \right)^2 \right]$$

**Example 28.** Find the moment of inertia of the two uniform joint rods having mass  $m$  each about point  $P$  as shown in figure. Using parallel axis theorem.




**Solution:** Moment of inertia of rod 1 about axis  $P$ ,  $I_1 = \frac{ml^2}{3}$

Moment of inertia of rod 2 about axis  $P$ ,  $I_2 = \frac{ml^2}{12} + m \left( \sqrt{5} \frac{l}{2} \right)^2$






So momentum of inertia of a system about axis  $P$ ,


$$I = I_1 + I_2 = \frac{m\ell^2}{3} + \frac{m\ell^2}{12} + m\left(\sqrt{5}\frac{\ell}{2}\right)^2$$

$$I = 5 \frac{m\ell^2}{3}$$

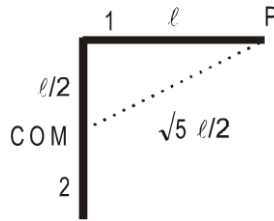


### List of some useful formule :

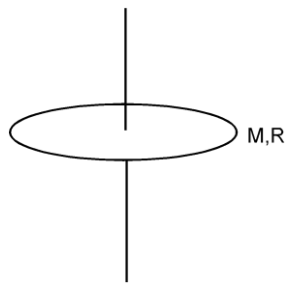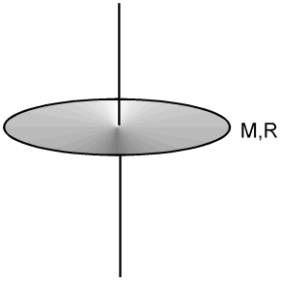
Object	Moment of Inertia
<b>Solid Sphere</b> 	$\frac{2}{5} MR^2$ (Uniform)
<b>Hollow Sphere</b> 	$\frac{2}{5} MR^2$ (Uniform)
<b>Ring.</b> 	$MR^2$ (Uniform or Non Uniform)
<b>Disc</b> 	$\frac{MR^2}{2}$ (Uniform)
<b>Hollow cylinder</b> 	

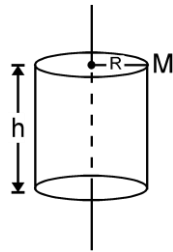


**Solid cylinder**




$$MR^2 \text{ (Uniform or Non Uniform)}$$




$$\frac{MR^2}{2} \text{ (Uniform)}$$



$$\frac{ML^2}{3} \text{ (Uniform)}$$

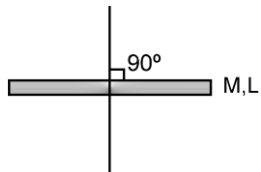


$$\frac{ML^2}{12} \text{ (Uniform)}$$




$$\frac{2ml^2}{3} \text{ (Uniform)}$$

**Rectangular Plate**

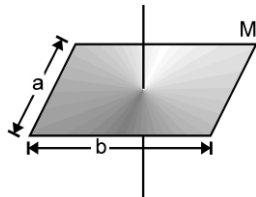


$$I = \frac{M(a^2 + b^2)}{12} \text{ (Uniform)}$$

**Square Plate**

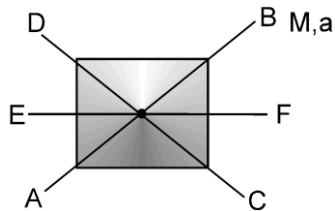


$$I_{AB} = I_{CD} = I_{DF} = \frac{Ma^2}{12} \text{ (Uniform)}$$

**Square Plate**

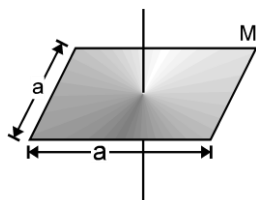

$$\frac{Ma^2}{6} \text{ (Uniform)}$$

**Cuboid**

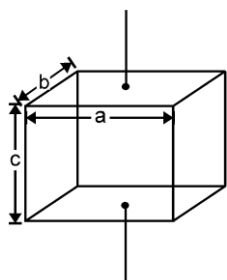

$$\frac{M(a^2 + b^2)}{12} \quad (\text{Uniform}); \quad \frac{Ma^2}{6} \quad (\text{When } a = b)$$

#### 4. RADIUS OF GYRATION :

Is a measure of the way in which the mass of rigid body is distributed with respect to the axis of rotation, we define a new parameter, the radius of gyration (K). It is related to the moment of inertia and total mass of the body.

$$I = MK^2$$

where  $I$  = Moment of Inertia of a body

$M$  = Mass of a body

$K$  = Radius of gyration

$$K = \sqrt{\frac{I}{M}}$$

Length  $K$  is the geometrical property of the body and axis of rotation.  
S.I. Unit of  $K$  is meter.

#### Solved Examples

**Example 29.** Find the radius of gyration of a solid uniform sphere of radius  $R$  about its tangent.

**Solution :**  $I = \frac{2}{5}mR^2 + mR^2 = \frac{7}{5}mR^2 = mK^2$

$$\Rightarrow K = \sqrt{\frac{7}{5}}R$$

**Example 30.** Find the radius of gyration of a hollow uniform sphere of radius  $R$  about its tangent.

**Solution :** Moment of inertia of a hollow sphere about a tangent,  $I = \frac{5}{3}MR^2$


$$MK^2 = \frac{5}{3}MR^2 \Rightarrow K = \sqrt{\frac{5}{3}}R$$



#### 5. MOMENT OF INERTIA OF BODIES WITH CUT :

#### Solved Examples

**Example 31** A uniform disc of radius  $R$  has a round disc of radius  $R/3$  cut as shown in Fig. .The mass of the remaining (shaded) portion of the disc equals  $M$ . Find the moment of inertia of such a disc relative to the axis passing through geometrical centre of original disc and perpendicular to the plane of the disc.



**Solution :** Let the mass per unit area of the material of disc be  $\sigma$ . Now the empty space can be considered as having density  $-\sigma$  and  $\sigma$ .

Now  $I_0 = I_\sigma + I_{-\sigma}$

$I_\sigma = (\sigma \pi R^2) R^2/2 = \text{M.I. of } \sigma \text{ about } o$

$$I_{-\sigma} = \frac{-\sigma \pi (R/3)^2 (R/3)^2}{2} + [-\sigma \pi (R/3)^2] (2R/3)^2 = \text{M.I. of } -\sigma \text{ about } o$$

$$\therefore I_0 = \frac{1}{2} MR^2 \quad \text{Ans.}$$

**Example 32.** Find the moment of inertia of a uniform disc of radius  $R_1$  having an empty symmetric annular region of radius  $R_2$  in between, about an axis passing through geometrical centre and perpendicular to the disc.


**Solution :**  $\rho = \frac{M}{\pi(R_1^2 - R_2^2)} \Rightarrow I = \rho \times \left( \frac{\pi R_1^4 - \pi R_2^4}{2} \right) I = \frac{M(R_1^2 + R_2^2)}{2} \quad \text{Ans.}$



## 6. TORQUE :

Torque represents the capability of a force to produce change in the rotational motion of the body.

### 6.1 Torque about a point :

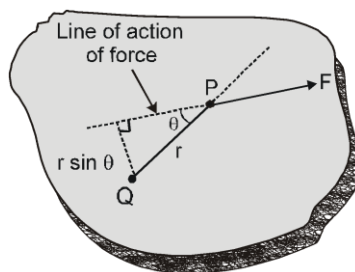

Torque of force  $\vec{F}$  about a point  $\vec{\tau} = \vec{r} \times \vec{F}$

Where  $\vec{F}$  = force applied

P = point of application of force

Q = Point about which we want to calculate the torque.

$\vec{r}$  = position vector of the point of application of force w.r.t. the point about which we want to determine the torque.

$$|\vec{\tau}| = r F \sin \theta = r_\perp F = r F_\perp$$

Where

$\theta$  = angle between the direction of force and the position vector of P wrt. Q.

$r_\perp = r \sin \theta$  = perpendicular distance of line of action of force from point Q, it is also called force arm.

$$F_{\perp} = F \sin \theta = \text{component of } \vec{F} \text{ perpendicular to } \vec{r}$$

SI unit of torque is Nm

Torque is a vector quantity and its direction is determined using right hand thumb rule and its always perpendicular to the plane of rotation of the body.


## Solved Examples

**Example 33.** A particle of mass  $M$  is released in vertical plane from a point  $P$  at  $x = x_0$  on the  $x$ -axis it falls vertically along the  $y$ -axis. Find the torque  $\tau$  acting on the particle at a time  $t$  about origin ?


**Solution :** Torque is produced by the force of gravity.

$$\vec{\tau} = r F \sin \theta \hat{k}$$

$$\text{or } \tau = r_{\perp} F = x_0 mg$$

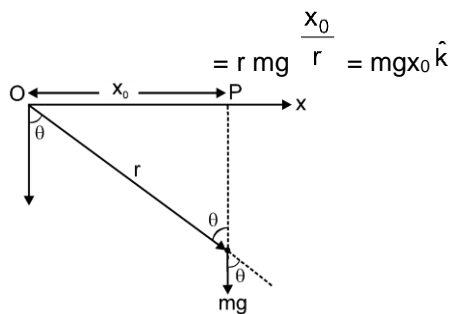


**Example 34.** A particle having mass  $m$  is projected with a velocity  $v_0$  from a point  $P$  on a horizontal ground making an angle  $\theta$  with horizontal. Find out the torque about the point of projection acting on the particle when it is at its maximum height ?

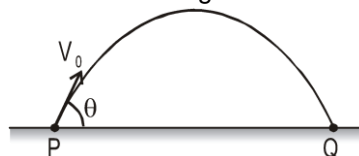

$$\text{Solution : } \tau = r F \sin \theta = \frac{R}{2} mg = \frac{v_0^2 \sin 2\theta}{2g} \quad \tau = \frac{mv_0^2 \sin 2\theta}{2}$$


**Example 35.** Find the torque about point  $O$  and  $A$ .

$$\vec{F} = 5\sqrt{3}\hat{i} + 5\hat{j}$$

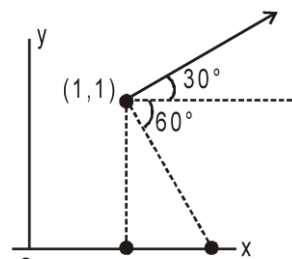

$$\begin{aligned} \text{Solution : } \text{Torque about point O, } \vec{\tau} &= \vec{r}_0 \times \vec{F}, \vec{r}_0 = \hat{i} + \hat{j}, \vec{F} = 5\sqrt{3}\hat{i} + 5\hat{j} \\ \vec{\tau} &= (\hat{i} + \hat{j}) \times (5\sqrt{3}\hat{i} + 5\hat{j}) = 5(1 - \sqrt{3})\hat{k} \\ \text{Torque about point A, } \vec{\tau} &= \vec{r}_a \times \vec{F}, \vec{r}_a = \hat{j}, \vec{F} = 5\sqrt{3}\hat{i} + 5\hat{j} \\ \vec{\tau} &= \hat{j} \times (5\sqrt{3}\hat{i} + 5\hat{j}) = 5(-\sqrt{3})\hat{k} \end{aligned}$$

**Example 36.** Find out torque about point A, O and B  $\vec{F} = 10\hat{i}$

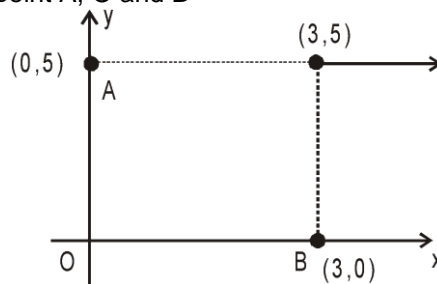

**Solution :**

Torque about point A,  $\vec{\tau}_A = \vec{r}_A \times \vec{F}$ ,  $\vec{r}_A = 3\hat{i}$ ,  $\vec{F} = 10\hat{i}$   
 $\vec{\tau}_A = 3\hat{i} \times 10\hat{i} = 0$

Torque about point B,  $\vec{\tau}_B = \vec{r}_B \times \vec{F}$ ,  $\vec{r}_B = 5\hat{j}$ ,  $\vec{F} = 10\hat{i}$   
 $\vec{\tau}_B = 5\hat{j} \times 10\hat{i} = -50\hat{k}$

Torque about point O,  $\vec{\tau}_O = \vec{r}_O \times \vec{F}$ ,  $\vec{r}_O = 3\hat{i} + 5\hat{j}$ ,  $\vec{F} = 10\hat{i}$   
 $\vec{\tau}_O = (3\hat{i} + 5\hat{j}) \times 10\hat{i} = -50\hat{k}$




## 6.2 Torque about an axis :

The torque of a force  $\vec{F}$  about an axis AB is defined as the component of torque of  $\vec{F}$  about any point O on the axis AB, along the axis AB.

In the given figure torque of  $\vec{F}$  about O is  $\vec{\tau}_O = \vec{r} \times \vec{F}$


The torque of  $\vec{F}$  about AB,  $\tau_{AB}$  is component of  $\vec{\tau}_O$  along line AB.

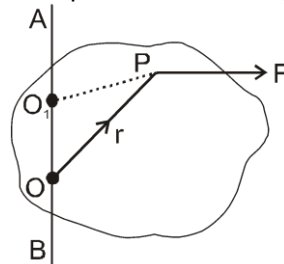

There are four cases of torque of a force about an axis.:

**Case I :** Force is parallel to the axis of rotation,  $\vec{F} \parallel \vec{AB}$   
 AB is the axis of rotation about which torque is required  
 $\vec{r} \times \vec{F}$  is perpendicular to  $\vec{F}$ , but  $\vec{F} \parallel \vec{AB}$ , hence  $\vec{r} \times \vec{F}$  is perpendicular to  $\vec{AB}$ .  
 The component of  $\vec{r} \times \vec{F}$  along  $\vec{AB}$  is, therefore, zero.


**Case II :** The line of force intersects the axis of rotation ( $\vec{F}$  intersect AB)

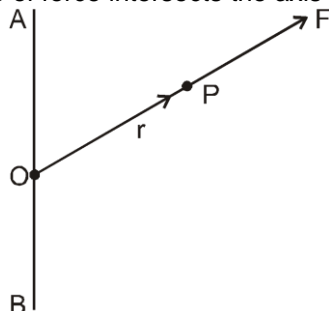

$\vec{F}$  intersects AB along  $\vec{r}$  then  $\vec{F}$  and  $\vec{r}$  are along the same line. The torque about O is  
 $\vec{r} \times \vec{F} = 0$ .

Hence component this torque along line AB is also zero.

**Case III :**  $\vec{F}$  perpendicular to  $\vec{AB}$  but  $\vec{F}$  and  $AB$  do not intersect.

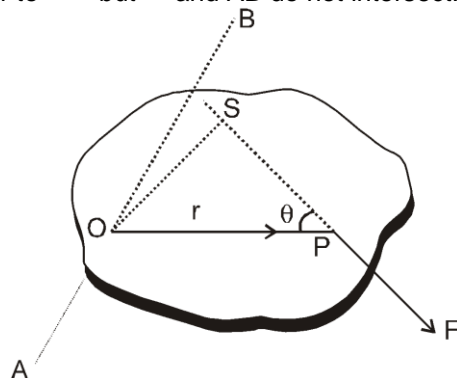

In the three dimensions, two lines may be perpendicular without intersecting each other.

Two nonparallel and nonintersecting lines are called skew lines.

Figure shows the plane through the point of application of force  $P$  that is perpendicular to the axis of rotation  $AB$ . Suppose the plane intersects the axis at the point  $O$ . The force  $F$  is in this plane (since  $F$  is perpendicular to  $AB$ ). Taking the origin at  $O$ ,

$$\text{Torque} = \vec{r} \times \vec{F} = \vec{OP} \times \vec{F} \quad \text{Thus, torque} = rF \sin \theta = F(OS)$$

where  $OS$  is the perpendicular from  $O$  to the line of action of the force  $\vec{F}$ . The line  $OS$  is also perpendicular to the axis of rotation. It is thus the length of the common perpendicular to the force and the axis of rotation.

The direction of  $\vec{\tau} = \vec{OP} \times \vec{F}$  is along the axis  $AB$  because  $\vec{AB} \perp \vec{OP}$  and  $\vec{AB} \perp \vec{F}$ . The torque about  $AB$  is, therefore, equal to the magnitude of  $\vec{\tau}$  that is  $F(OS)$ .


Thus, the torque of  $F$  about  $AB$  = magnitude of the force  $F \times$  length of the common perpendicular to the force and the axis. The common perpendicular  $OS$  is called the lever arm or moment arm of this torque.

**Case IV :**  $\vec{F}$  and  $\vec{AB}$  are skew but not perpendicular.

Here we resolve  $\vec{F}$  into two components, one is parallel to axis and other is perpendicular to axis. Torque of the parallel part is zero and that of the perpendicular part may be found, by using the result of **case (III)**.

## Solved Examples


**Example 37.** Find the torque of weight about the axis passing through point  $P$ .

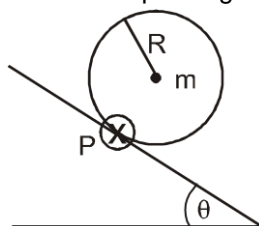

**Solution :**  $\vec{\tau} = \vec{r} \times \vec{F}$ ,  $r = R$ ,  $F = mg \sin \theta$

$r$  and  $F$  both are at perpendicular so torque about point  $P = mgR \sin \theta$

**Example 38.** A bob of mass  $m$  is suspended at point  $O$  by string of length  $\ell$ . Bob is moving in a horizontal circle find out (i) torque of gravity and tension about point  $O$  and  $O'$ . (ii) Net torque about axis  $OO'$  of gravity, tension and net force.

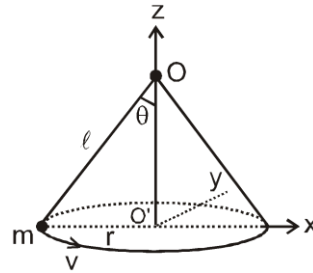

**Solution :**

(i) Torque about point O

Torque of tension (T),  $\tau_{\text{ten}} = 0$  (tension is passing through point O)

Torque of gravity  $\tau_{\text{mg}} = \ell m g \sin \theta$

Torque about point O'


Torque of gravity  $\tau_{\text{mg}} = mgr$  ;  $r = \ell \sin \theta$

Torque of tension  $\tau_{\text{mg}} = \ell m g \sin \theta$  (along negative  $\hat{j}$ )

Torque of tension  $\tau_{\text{ten}} = T r \sin(90 + \theta)$  ( $T \cos \theta = mg$ )

$\tau_{\text{ten}} = T r \cos \theta$

$\tau_{\text{ten}} = \frac{mg}{\cos \theta} (\ell \sin \theta) \cos \theta = mg \ell \sin \theta$  (along positive  $\hat{j}$ )



(ii) Torque about axis OO'


Torque of gravity about axis OO'  $\tau_{\text{mg}} = 0$  (force mg parallel to axis OO')

Torque of tension about axis OO'  $\tau_{\text{ten}} = 0$  (force T is passing through the axis OO')

Net torque about axis OO'  $\tau_{\text{net}} = 0$

**Example 39.**

A wheel of radius 20 cm has four forces applied to it as shown in Fig. Then, the torque produced by these forces about an axis which is passing through O and perpendicular to plane.




(1) 5.4 Nm anticlockwise

(3) 2.0 Nm clockwise

(2) 1.80 Nm clockwise

(4) 5.4 Nm clockwise


**Solution :**

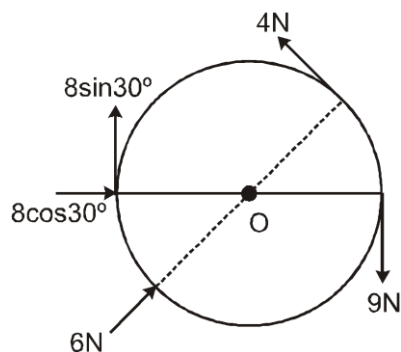

torque due to 6 N,  $8 \cos 30^\circ$  N, will be zero because line of action of these force passing through the axis.


Net torque =  $8 \sin 30^\circ \times 0.2 - 4 \times 0.2 + 9 \times 0.2 = 1.8 \text{ Nm}$   
clock wise

**Example 40.** Calculate the total torque acting on the body shown in figure about an axis which is passing through point O and perpendicular to plane -

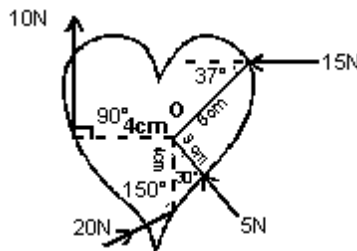

- (1) 0.54 N-m      (2) 0.27 N-m      (3) 1.08 N-m      (4) .0054 N-m.

**Solution :**

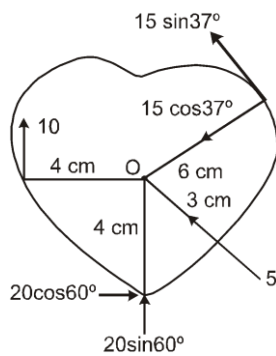


Torque due to 5 N,  $20 \sin 60^\circ$  N,  $15 \cos 37^\circ$  N will be zero because line of action of these force passing through the axis.

Net torque =  $20 \cos 60^\circ \times 0.04 + 15 \sin 37^\circ \times 0.06 - 10 \times 0.04 = 0.54 \text{ Nm}$   
anti clock wise

### 6.3 Force Couple :

A pair of forces each of same magnitude and acting in opposite direction is called a force couple.

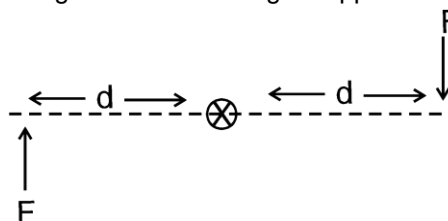


Torque due to couple = Magnitude of one force  $\times$  distance between their lines of action.

Magnitude of torque =  $\tau = F (2d)$

☛ A couple does not exert a net force on an object even though it exerts a torque.

☛ Net torque due to a force couple is same about any point.

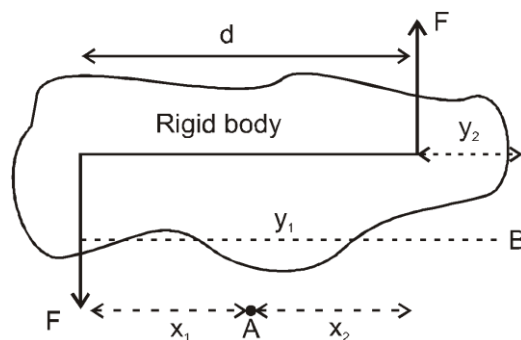

$$\begin{aligned}\text{Torque about A} &= x_1 F + x_2 F \\ &= F(x_1 + x_2) = Fd \\ \text{Torque about B} &= y_1 F - y_2 F \\ &= F(y_1 - y_2) = Fd\end{aligned}$$

If net force acting on a system is zero, torque is same about any point.


A consequence is that, if  $F_{\text{net}} = 0$  and  $\tau_{\text{net}} = 0$  about one point, then  $\tau_{\text{net}} = 0$  about any point.



## 6.4 Point of Application of Force :

Point of Application of force is the point at which, if net force is assumed to be acting, then it will produce same translational as well as rotational effect, as was produced earlier.

We can also define point of application of force as a point about which torque of all the forces is zero.

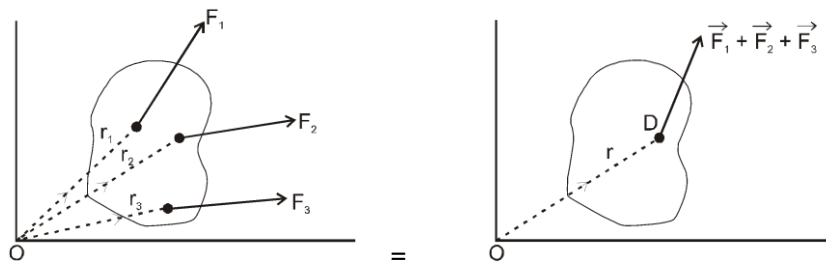


Consider three forces  $\vec{F}_1, \vec{F}_2, \vec{F}_3$  acting on a body if D is point of application of force then torque of  $\vec{F}_1 + \vec{F}_2 + \vec{F}_3$  acting at a point D about O is same as the original torque about O.


$$[\vec{r}_1 \times \vec{F}_1 + \vec{r}_2 \times \vec{F}_2 + \vec{r}_3 \times \vec{F}_3] = \vec{r} \times (\vec{F}_1 + \vec{F}_2 + \vec{F}_3)$$

## Solved Examples

**Example 41.** Determine the point of application of force from point A, when forces of 20 N & 30 N are acting on the rod as shown in figure.

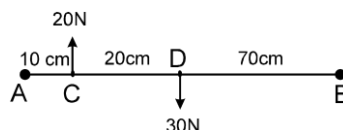


**Solution :** Net force acting on the rod  $F_{\text{rel}} = 10\text{N}$   
 Net torque acting on the rod about point C  
 $\tau_c = (20 \times 0) + (30 \times 20) = 600$  clockwise  
 Let the point of application be at a distance x from point C



$$600 = 10x \Rightarrow x = 60 \text{ cm}$$

$\therefore$  70 cm from A is point of Application

**Example 42.** Determine the point of application of force, when forces are acting on the rod as shown in figure.

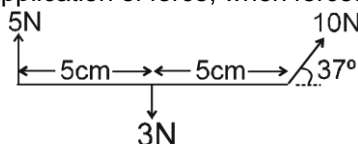

**Solution :**



Torque of B about A  $\tau_1 = 3\text{N} \times 5 = 15\text{N cm}$  (clockwise)

Torque of C about A  $\tau_2 = 6\text{N} \times 10 = 60\text{N cm}$  (anticlockwise)

Resultant force perpendicular to the rod  $F = 8\text{N}$

$\tau_1 + \tau_2 = Fx$  ( $x$  = distance from point A)

$$-15 + 60 = 8x$$

$$x = 45/8 = 5.625 \text{ cm}$$

**Note :** (i) Point of application of gravitational force is known as the centre of gravity.

(ii) Centre of gravity coincides with the centre of mass if value of  $\vec{g}$  is assumed to be constant.

(iii) Concept of point of application of force is imaginary, as in some cases it can lie outside the body.




## 6.5 Rotation about a fixed axis :

If  $I_{\text{Hinge}}$  = moment of inertia about the axis of rotation (since this axis passes through the hinge, hence the name  $I_{\text{Hinge}}$ ).

$\vec{\tau}_{\text{ext}}$  = resultant external torque acting on the body about axis of rotation

$\alpha$  = angular acceleration of the body.

$$\vec{\tau}_{\text{ext}})_{\text{Hinge}} = I_{\text{Hinge}} \vec{\alpha}$$

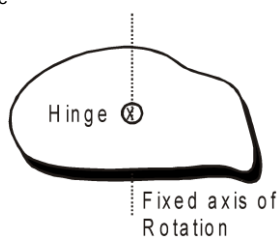

$$\text{Rotational Kinetic Energy} = \frac{1}{2} I \omega^2$$

$$\vec{P} = M \vec{v}_{\text{CM}}$$

$$\vec{F}_{\text{external}} = M \vec{a}_{\text{CM}}$$

Net external force acting on the body has two component tangential and centripetal.


$$\Rightarrow F_c = m a_c = m \frac{v^2}{r_{\text{CM}}} = m \omega^2 r_{\text{CM}}$$

$$\Rightarrow F_t = m a_t = m \alpha r_{\text{CM}}$$

## Solved Examples

**Example 43.** The pulley shown in figure has a moment of inertia  $I$  about its axis and its radius is  $R$ . Find the magnitude of the acceleration of the two blocks.

Assume that the string is light and does not slip on the pulley.



**Solution :**

Suppose the tension in the left string is  $T_1$  and that in the right string is  $T_2$ . Suppose the block of mass  $M$  goes down with an acceleration  $\alpha$  and the other block moves up with the same acceleration. This is also the tangential acceleration of the rim of the wheel as the string does not slip over the rim. The angular acceleration of the wheel is, therefore,  $\alpha = a/R$ . The equations of motion for the mass  $M$ , the mass  $m$  and the pulley are as follows :

$$Mg - T_1 = Ma \quad \dots\dots(i)$$

$$T_2 - mg = ma \quad \dots\dots(ii)$$

$$T_1 R - T_2 R = I\alpha = I\alpha/R \quad \dots\dots(iii)$$

Putting  $T_1$  and  $T_2$  from (i) and (ii) into (iii),

$$[(Mg - a) - m(g + a)] R = \frac{a}{R} I \text{ which gives } a = \frac{(M - m)gR^2}{I + (M + m)R^2}$$

**Example 44.** A uniform rod of mass  $m$  and length  $\ell$  can rotate in vertical plane about a smooth horizontal axis hinged at point H.



(i) Find angular acceleration  $\alpha$  of the rod just after it is released from initial horizontal position from rest ?

(ii) Calculate the acceleration (tangential and radial) of point A at this moment.

(iii) Calculate net hinge force acting at this moment.


(iv) Find  $\alpha$  and  $\omega$  when rod becomes vertical.

(v) Find hinge force when rod become vertical.

**Solution :**

(i)  $\tau_H = I_H \alpha$


$$mg \cdot \frac{\ell}{2} = \frac{m\ell^2}{3} \alpha \Rightarrow \alpha = \frac{3g}{2\ell}$$



(ii)  $a_{tA} = \alpha \ell = \frac{3g}{2\ell} \cdot \ell = \frac{3g}{2}$

$$a_{cA} = \omega^2 r = 0 \cdot \ell = 0 \quad (\because \omega = 0 \text{ just after release})$$

(iii) Suppose hinge exerts normal reaction in component form as shown



In vertical direction

$$F_{\text{ext}} = ma_{\text{CM}}$$

$$\Rightarrow mg - N_1 = m \cdot \frac{3g}{4} \quad (\text{we get the value of } a_{\text{CM}} \text{ from previous example})$$

$$\Rightarrow N_1 = \frac{mg}{4}$$

In horizontal direction

$$F_{\text{ext}} = ma_{\text{CM}} \Rightarrow N_2 = 0 \quad (a_{\text{CM}} \text{ in horizontal} = 0 \text{ as } \omega = 0 \text{ just after release}).$$

(vi) Torque = 0 when rod becomes vertical.

so  $\alpha = 0$

using energy conservation  $\frac{mg\ell}{2} = \frac{1}{2} I \omega^2$   $\left( I = \frac{m\ell^2}{3} \right)$   $\omega = \sqrt{\frac{3g}{\ell}}$

(v) When rod becomes vertical

$$\alpha = 0, \omega = \sqrt{\frac{3g}{\ell}}$$

$$F_H - mg = \frac{m\omega^2\ell}{2}$$

$$F_H = \frac{5mg}{2} \quad \text{Ans.}$$


**Example 45.** A cylinder of mass  $M$  and radius  $r$  is mounted on a frictionless axle over a well. A rope of negligible mass is wrapped around the solid cylinder and a bucket of mass  $m$  is suspended from the rope. The linear acceleration of the bucket will be

**Solution :**

$$mg - T = ma$$

$$T = m(g - a)$$

$$\tau = I\alpha = rT \Rightarrow (1/2) Mr^2 \cdot a/r = rT$$
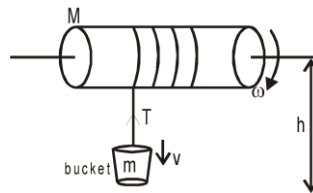
$$\Rightarrow T = 1/2 Ma \quad \dots\dots(2)$$


From (1) and (2),

$$(1/2) Ma = m(g - a) \Rightarrow \frac{M+2m}{2} a = mg, \quad \Rightarrow a = \frac{2mg}{M+2m}$$


**Example 46.** A uniform solid cylinder of mass  $M$  and radius  $R$  rotates about a frictionless horizontal axle. Two similar masses suspended with the help of two ropes wrapped around the cylinder. If the system is released from rest then the tension in each rope will be

**Solution :**


$$mg - T = ma$$

$$mg - T = ma$$

From these equation,  $2mg - 2T = 2ma \quad \dots(1)$

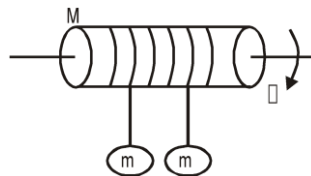

$$\tau = (2T) R = I \alpha = (1/2) MR^2 \cdot (a/R) \quad \dots(2)$$

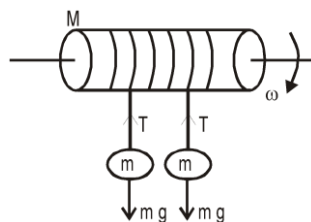

$$T = \frac{Mm}{M+4m} g$$

From (1) and (2),

Note: Also


$$a = 4mg / (M + 4m)$$



## 7. EQUILIBRIUM

A system is in mechanical equilibrium if it is in translational as well as rotational equilibrium.


For this :  $\vec{F}_{\text{net}} = 0$   $\vec{\tau}_{\text{net}} = 0$  (about every point)

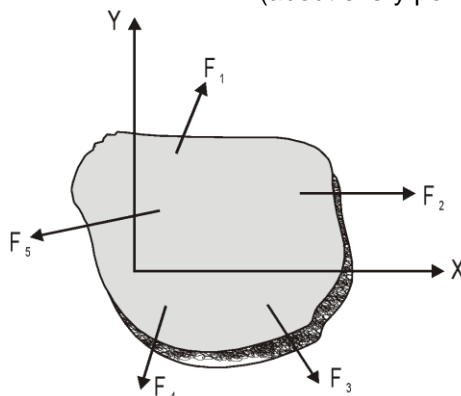

From (6.3), if  $\vec{F}_{\text{net}} = 0$  then  $\vec{\tau}_{\text{net}}$  is same about every point

Hence necessary and sufficient condition for equilibrium is  $\vec{F}_{\text{net}} = 0$ ,  $\vec{\tau}_{\text{net}} = 0$  about any one point, which we can choose as per our convenience. ( $\vec{\tau}_{\text{net}}$  will automatically be zero about every point)


or

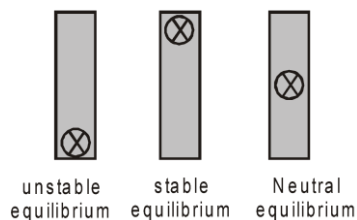

The equilibrium of a body is called **stable** if the body tries to regain its equilibrium position after being slightly displaced and released. It is called **unstable** if it gets further displaced after being slightly displaced and released. If it can stay in equilibrium even after being slightly displaced and released, it is said to be in **neutral** equilibrium.

### Solved Examples

**Example 47.** Two light vertical springs with spring constants  $k_1$  &  $k_2$  and same natural lengths are separated by a distance  $\ell$ . Their upper ends are fixed to the ceiling and their lower ends to the ends A and B of a light horizontal rod AB. A vertical downward force  $F$  is applied at point C on the rod. AB will remain horizontal in equilibrium if the distance AC is :

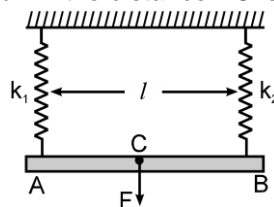


**Solution :**

(1)  $\frac{\ell}{2}$       (2)  $\frac{\ell k_1}{k_2 + k_1}$       (3)  $\frac{\ell k_2}{k_1}$       (4\*)  $\frac{\ell k_2}{k_1 + k_2}$

AC = x       $x_0 = \text{ext}^n$ . in each spring

Torque about C       $K_1 x_0 x = K_2 x_0 (\ell - x)$        $x = \frac{\ell k_2}{k_1 + k_2}$

**Example 48.** A uniform ladder of length 5 m and mass 100 kg is in equilibrium between vertical smooth wall and rough horizontal surface. Find minimum friction co-efficient between floor and ladder for this equilibrium.

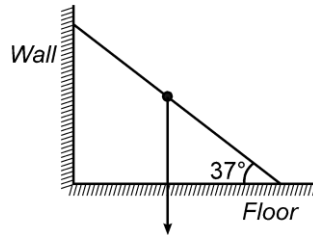

(1) 1/2


(2) 3/4

(3) 1/3

(4\*) 2/3

**Solution :**

For vertical equilibrium ;

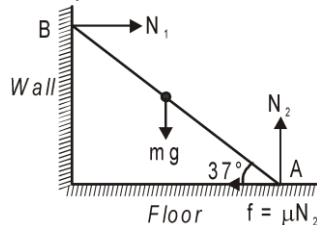

$$mg = N_2 \quad \dots\dots(i)$$

For horizontal equilibrium ;

$$\mu N_2 = N_1 \quad \dots\dots(ii)$$

Torque about A ;


$$N_1 \times 5 \sin 37^\circ = mg \times 2.5 \cos 37^\circ \quad \dots\dots(iii)$$

Solving ;  $\mu = 2/3$

**Example 49.** A uniform metre stick having mass 400 g is suspended from the fixed supports through two vertical light strings of equal lengths fixed at the ends. A small object of mass 100 g is put on the stick at a distance of 60 cm from the left end. Calculate the tensions in the two strings. ( $g = 10 \text{ m/s}^2$ )

**Answer.** 2.4 N in the left string and 2.6 N in the right

**Solution.**



$$\text{Using force balance} \quad T_1 + T_2 = 0.4 \text{ g} + 0.1 \text{ g} = 0.5 \text{ g} = 5$$

Torque about any point should be zero for rotation equilibrium.

$$\tau_A = 0 \quad (T_2 \times 100 \text{ cm}) = (0.4 \text{ g}) (50 \text{ cm}) + (0.1 \text{ g}) (60 \text{ cm})$$

$$T_2 = (0.4 \times 10 \times 0.5) + (0.1 \times 10 \times 0.6) = 2.6 \text{ N}$$

$$T_2 = 2.6 \text{ N}$$

$$T_1 = 2.4 \text{ N}$$




## 8. ANGULAR MOMENTUM ( $\vec{L}$ )

### 8.1. Angular momentum of a particle about a point.

$$\vec{L} = \vec{r} \times \vec{P} \quad \Rightarrow \quad L = rpsin\theta$$

$$\text{or } |\vec{L}| = r_{\perp} P$$

$$\text{or } |\vec{L}| = P_{\perp} r$$

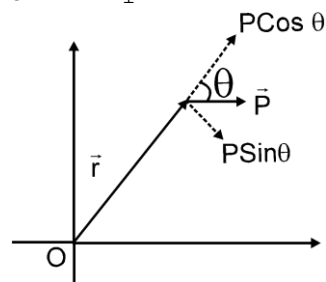

Where  $\vec{P}$  = momentum of particle

$\vec{r}$  = position of vector of particle with respect to point O about which angular momentum is to be calculated.

$\theta$  = angle between vectors  $\vec{r}$  &  $\vec{P}$


$r_{\perp}$  = perpendicular distance of line of motion of particle from point O.

$P_{\perp}$  = component of momentum perpendicular to  $\vec{r}$ .

SI unit of angular momentum is  $\text{kgm}^2/\text{sec}$ .

## Solved Examples

**Example 50.** A particle of mass 'm' starts moving from point (0,d) with a constant velocity  $u \hat{i}$ . Find out its angular momentum about origin at this moment what will be the answer at the later time?

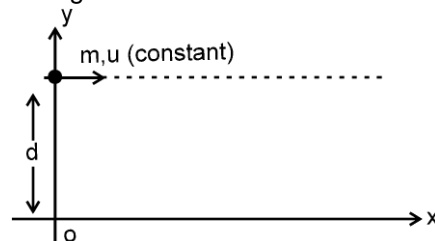


**Solution :**  $\vec{L} = -m d u \cdot \hat{k}$

**Example 51.** A particle of mass 'm' is projected on horizontal ground with an initial velocity of u making an angle  $\theta$  with horizontal. Find out the angular momentum of particle about the point of projection when

- it just starts its motion
- it is at highest point of path.
- it just strikes the ground.

**Answer.** (i) 0; (ii)  $mu \cos \theta \frac{u^2 \sin^2 \theta}{2g}$ ; (iii)  $mu \sin \theta \frac{u^2 \sin 2\theta}{g}$

**Solution :**

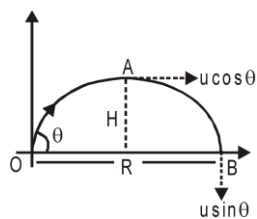

(i) Angular momentum about point O is zero.

(ii) Angular momentum about point A.

$$\vec{L} = \vec{r} \times \vec{p}$$

$$L = H \times mu \cos \theta$$

$$L = mu \cos \theta \frac{u^2 \sin^2 \theta}{2g}$$

Ans.

(iii) Angular momentum about point B.

$$L = R \times mu \sin \theta$$


$$L = mu \sin \theta \frac{u^2 \sin 2\theta}{g}$$

Ans.

**Example 52.** A particle of mass 'm' is projected on horizontal ground with an initial velocity of u making an angle  $\theta$  with horizontal. Find out the angular momentum at any time t of particle p about :

(i) y axis

(ii) z-axis

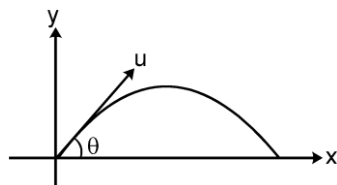


**Solution :**

(i) velocity components are parallel to the y-axis. so,  $L = 0$

$$(ii) \tau = \frac{dL}{dt} = -1/2 mu \cos \theta \cdot gt^2$$

$$-mgx = \frac{dL}{dt} \quad -mgx dt = dL$$


$$\int_0^t -mgx dt = \int_0^L dL$$

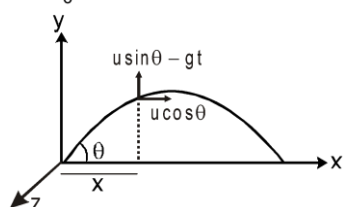

angular momentum about the z-axis is :  $L = -1/2 mu \cos \theta \cdot gt^2$  Ans.



## 8.2 Angular momentum of a rigid body rotating about fixed axis :

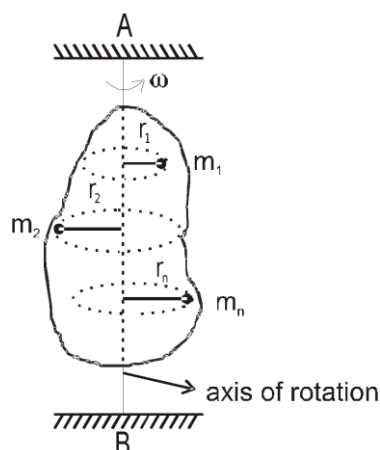

Angular momentum of a rigid body about the fixed axis AB is  $L_{AB} = L_1 + L_2 + L_3 + \dots + L_n$

$$L_1 = m_1 r_1 \omega r_1, L_2 = m_2 r_2 \omega r_2, L_3 = m_3 r_3 \omega r_3, L_n = m_n r_n \omega r_n$$

$$L_{AB} = m_1 r_1 \omega r_1 + m_2 r_2 \omega r_2 + m_3 r_3 \omega r_3 + \dots + m_n r_n \omega r_n$$

$$L_{AB} = \sum_{n=1}^{n=n} m_n (r_n)^2 \times \omega \quad \left[ \sum_{n=1}^{n=n} m_n (r_n)^2 = I_H \right]$$

$$L_{AB} = I_H \omega$$

$$L_H = I_H \omega$$

$L_H$  = Angular momentum of object about axis of rotation.


$I_H$  = Moment of Inertia of rigid body about axis of rotation.

$\omega$  = angular velocity of the object.

## Solved Examples

**Example 53.** Two small balls A and B, each of mass  $m$ , are attached rigidly to the ends of a light rod of length  $d$ . The structure rotates about the perpendicular bisector of the rod at an angular speed  $\omega$ . Calculate the angular momentum of the individual balls and of the system about the axis of rotation.

**Solution :** Consider the situation shown in figure. The velocity of the ball A with respect to the centre O is  $v = \frac{\omega d}{2}$ . The angular momentum of the ball with respect to the axis is

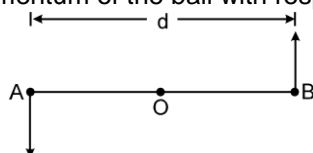

$$L_1 = mvr = m \left( \frac{\omega d}{2} \right) \left( \frac{d}{2} \right) = \frac{1}{4} m \omega d^2. \text{ The same the angular momentum } L_2 \text{ of the second ball. The angular momentum of the system is equal to sum of these two angular momenta i.e., } L = 1/2 m \omega d^2.$$

**Example 54.** Two particles of mass  $m$  each are attached to a light rod of length  $d$ , one at its centre and the other at a free end. The rod is fixed at the other end and is rotated in a plane at an angular speed  $\omega$ . Calculate the angular momentum of the particle at the end with respect to the particle at the centre.

**Solution :** The situation is shown in figure. The velocity of the particle A with respect to the fixed end O is  $v_A = \left( \frac{d}{2} \right) \omega$  and that of B with respect to O is  $v_B = \omega d$ . Hence the velocity of B with respect to A is  $v_B - v_A = \omega \left( \frac{d}{2} \right)$ . The angular momentum of B with respect to A is, therefore,



$$L = mvr = m\omega \left( \frac{d}{2} \right) \frac{d}{2} = \frac{1}{4} m\omega d^2$$

along the direction perpendicular to the plane of rotation.

**Example 55.** A uniform circular disc of mass 200 g and radius 4.0 cm is rotated about one of its diameter at an angular speed of 10 rad/s. Find the kinetic energy of the disc and its angular momentum about the axis of rotation.

**Solution :** The moment of inertia of the circular disc about its diameter is

$$I = \frac{1}{4} Mr^2 = \frac{1}{4} (0.200 \text{ kg}) (0.04 \text{ m})^2 = 8.0 \times 10^{-5} \text{ kg-m}^2.$$


The kinetic energy is

$$K = \frac{1}{2} I\omega^2 = \frac{1}{2} (8.0 \times 10^{-5} \text{ kg-m}^2) (10 \text{ rad/s})^2 = 4.0 \times 10^{-3} \text{ J}$$

and the angular momentum about the axis of rotation is

$$L = I\omega = (8.0 \times 10^{-5} \text{ kg-m}^2) (10 \text{ rad/s}) \\ = 8.0 \times 10^{-4} \text{ kg-m}^2/\text{s} = 8.0 \times 10^{-4} \text{ J-s}.$$

**Example 56.** A particle of mass  $m$  starts moving from origin with a constant velocity  $u\hat{i}$  find out its angular momentum about origin at this moment. What will be the answer later on? What will be the answer if the speed increases.



**Solution :**

$$\vec{L} = \vec{r} \times \vec{p}$$

$$\vec{L} = r\hat{i} \times mu\hat{i} = 0$$



### 8.3 Conservation of Angular Momentum

$$\vec{\tau} = \frac{d\vec{L}}{dt}$$

**Newton's 2nd law in rotation :**

where  $\vec{\tau}$  and  $\vec{L}$  are about the same axis.



Angular momentum of a particle or a system remains constant if  $\tau_{\text{ext}} = 0$  about the axis of rotation.

Even if net angular momentum is not constant, one of its component about an axis remains constant if component of torque about that axis is zero


$$\int \tau dt = \Delta J$$

**Impulse of Torque :**


$\Delta J \rightarrow$  Change in angular momentum.

(i) Suppose a ball is tied at one end of a cord whose other end passes through a vertical hollow tube.


The tube is held in one hand and the cord in the other. The ball is set into rotation in a horizontal circle. If the cord is pulled down, shortening the radius of the circular path of the ball, the ball rotates faster than before. The reason is that by shortening the radius of the circle, the moment of inertia of the ball about the axis of rotation decreases. Hence, by the law of conservation of angular momentum, the angular velocity of the ball about the axis of rotation increases. [fig. (1)]



- (ii) When a diver jumps into water from a height, he does not keep his body straight but pulls in his arms and legs toward the centre of his body. On doing so, the moment of inertia  $I$  of his body decreases. But since the angular momentum  $I \omega$  remains constant, his angular velocity  $\omega$  correspondingly increases. Hence during jumping he can rotate his body in the air - fig. (2)]

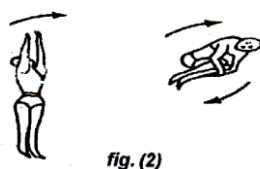


- (iii) In, a man with his arms outstretched and holding heavy dumb bells in each hand, is standing at the centre of a rotating table. When the man pulls in his arms, the speed of rotation of the table increases. The reason is that on pulling in the arms, the distance  $R$  of the dumbbells from the axis of rotation decreases and so the moment of inertia of the man decreases. Therefore, by conservation of angular momentum, the angular velocity increases. [fig. (3)]



In the same way, the ice skater and the ballet dancer increase or decrease the angular velocity of spin about a vertical axis by pulling or extending out their limbs.

## Solved Examples

- Example 57.** A uniform rod of mass  $m$  and length  $\ell$  can rotate freely on a smooth horizontal plane about a vertical axis hinged at point H. A point mass having same mass  $m$  coming with an initial speed  $u$  perpendicular to the rod, strikes the rod perfectly in-elastically ( $e = 0$ ) at its free end. Find out the angular velocity of the rod just after collision ?



- Solution :** Angular momentum is conserved about H because no external force is present in horizontal plane which is producing torque about H.

$$mul \left( \frac{m\ell^2}{3} + m\ell^2 \right) = \omega \quad \Rightarrow \quad \omega = \frac{3u}{4\ell}$$

**Example 58.** A cockroach of mass 'm' is start moving, with velocity v on the circumference of a disc of mass 'M' and radius 'R' what will be angular velocity of disc. Initially total angular momentum = Final total angular momentum.

$$0 + 0 = mvR + \frac{mR^2}{2} \omega \quad \omega = (-) \frac{2mv}{MR} \quad \text{—ive angular velocity for opposite direction.}$$

**Example 59.** A rotating table has angular velocity ' $\omega$ ' and moment of inertia  $I_1$ . A person of mass 'm' stands of centre of rotating table. If the person moves r from the centre what will be angular velocity of rotating table.

$$I_1 \omega = (I_1 + mr^2) \omega_2 \quad \text{or} \quad \omega_2 = \frac{I_1 \omega}{I_1 + mr^2}$$

**Example 60.** A horizontal disc is rotating about a vertical axis passing through its centre at the rate of 100 rev/min. A blob of wax, of mass 20 gm, falls on the disc and sticks to it at a distance of 5 cm from the axis. If the moment of inertia of the disc about the given axis is  $2 \times 10^{-4} \text{ kg-m}^2$ , find the new frequency of rotation of the disc.

**Solution :** The M.I. of the disc,  $I_1 = 2 \times 10^{-4} \text{ kg-m}^2$ .  
The M.I. of the blob of wax,  $I_2 = 20 \times 10^{-3} \times (0.05)^2 = 0.5 \times 10^{-4} \text{ kg-m}^2$ .  
Let the initial angular speed of the disc be  $\omega = 2\pi n$  and let the final angular speed of the disc and blob of wax be  $\omega' = 2\pi n'$ .  
Then,  $I_1 \omega = (I_1 + I_2) \omega'$  (The law of conservation of angular momentum)  
or  $I_1 \times 2\pi n = (I_1 + I_2) 2\pi n'$

$$\therefore 2 \times 10^{-4} \times 100 = (2 \times 10^{-4} + 0.5 \times 10^{-4}) \times n' \quad \text{so} \quad n' = \frac{2}{2.5} \times 10^2 = 80 \text{ rev/min.}$$

**Example 61.** A solid cylinder of mass 'M' kg and radius 'R' is rotating along its axis with angular velocity  $\omega$  without friction. A particle of mass 'm' moving at v m/sec collide against the cylinder and sticks to it. Then calculate angular velocity and angular momentum of cylinder and initial and final kinetic energy of system?

Initial momentum of cylinder =  $I\omega$  Initial momentum of particle =  $m v R$   
Before sticking total angular momentum  $J_1 = I\omega + mvR$   
After sticking total angular momentum  $J_2 = (I + mR^2) \omega'$   
if  $\tau = 0$  then  $J_1 = J_2$

$$\begin{aligned} \text{Angular velocity } \omega' &= \frac{I\omega + mvR}{I + mR^2} \\ \text{Initial kinetic energy of system} &= \frac{1}{2} I \omega^2 + \frac{1}{2} m v^2 \\ \text{Final kinetic energy of system} &= \frac{1}{2} (I + mR^2) \omega'^2 \end{aligned}$$

**Example 62** If the earth were suddenly to shrink to half its size (its mass remaining const) what would be the length of a day.

**Solution :**  $I_1 \omega_1 = I_2 \omega_2$  so  $\frac{2}{5} MR^2 \times \frac{2\pi}{T_1} = \frac{2}{5} M \left(\frac{R}{2}\right)^2 \frac{2\pi}{T_2}$   
hence  $T_1 = 24 \text{ hr}$   $T_2 = 6 \text{ hr}$



## 9. COMBINED TRANSLATIONAL AND ROTATIONAL MOTION OF A RIGID BODY

The general motion of a rigid body can be thought of as a sum of two independent motions. A translation of some point of the body plus a rotation about this point. A most convenient choice of the point is the centre of mass of the body as it greatly simplifies the calculations.



Consider a fan inside a train, and an observer A on the platform.

If the fan is switched off while the train moves, the motion of fan is pure translation as each point on the fan undergoes same translation in any time interval.

If the fan is switched on while the train is at rest the motion of fan is pure rotation about its axle; as each point on the axle is at rest, while other points revolve about it with equal angular velocity.

If the fan is switched on while the train is moving, the motion of fan to the observer on the platform is neither pure translation nor pure rotation. This motion is an example of general motion of a rigid body.


Now if there is an observer B inside the train, the motion of fan will appear to him as pure rotation.

Hence we can see that the general motion of fan w.r.t. observer A can be resolved into pure rotation of fan as observed by observer B plus pure translation of observer B (w.r.t. observer A)

Such a resolution of general motion of a rigid body into pure rotation & pure translation is not restricted to just the fan inside the train, but is possible for motion of any rigid system.

## 9.1 Kinematics of general motion of a rigid body :

For a rigid body as earlier stated value of angular displacement ( $\theta$ ), angular velocity ( $\omega$ ), angular acceleration ( $\alpha$ ) is same for all points on the rigid body about any other point on the rigid body. Hence if we know velocity of any one point (say A) on the rigid body and angular velocity of any point on the rigid body about any other point on the rigid body (say  $\omega$ ), velocity of each point on the rigid body can be calculated.

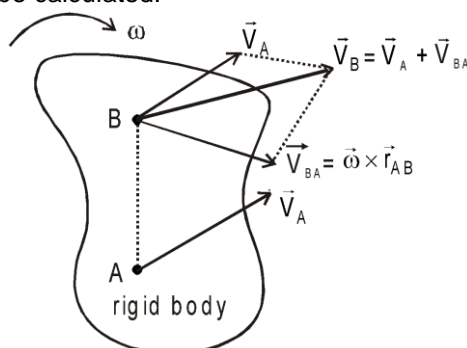

since distance AB is fixed

$$\vec{V}_{BA} \perp \vec{AB}$$

$$V_{BA \perp}$$

we know that  $\omega = \frac{V_{BA \perp}}{r_{BA}}$

$$V_{BA \perp} = V_{BA} = \omega r_{BA}$$

in vector form  $\vec{V}_{BA} = \vec{\omega} \times \vec{r}_{BA}$


Now from relative velocity :  $\vec{V}_{BA} = \vec{V}_B - \vec{V}_A$

$$\vec{V}_B = \vec{V}_A + \vec{V}_{BA} \Rightarrow \vec{V}_B = \vec{V}_A + \vec{\omega} \times \vec{r}_{BA}$$

$$\text{similarly } \vec{a}_B = \vec{a}_A + \vec{\alpha} \times \vec{r}_{BA} \quad [\text{for any rigid system}]$$

## Solved Examples

**Example 63.** Consider the general motion of a wheel (radius  $r$ ) which can be viewed on pure translation of its center O (with the velocity  $v$ ) and pure rotation about O (with angular velocity  $w$ )

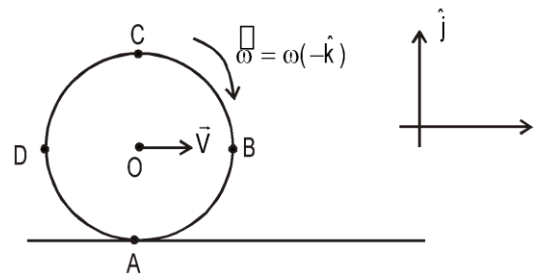

Find out  $\vec{v}_{AO}, \vec{v}_{BO}, \vec{v}_{CO}, \vec{v}_{DO}$  and  $\vec{v}_A, \vec{v}_B, \vec{v}_C, \vec{v}_D$

**Solution :**

$$\vec{v}_{AO} = (\vec{\omega} \times \vec{r}_{AO})$$

$$\vec{v}_{AO} = (\omega (-\hat{k}) \times \vec{OA})$$

$$\vec{v}_{AO} = (\omega (-\hat{k}) \times r(-\hat{j})) ; \vec{v}_{AO} = -\omega r \hat{i}$$

$$\text{similarly } \vec{v}_{BO} = \omega r (-\hat{j})$$

$$\vec{v}_{CO} = \omega r (\hat{i})$$

$$\vec{v}_{DO} = \omega r (\hat{j})$$

$$\vec{v}_A = \vec{v}_O + \vec{v}_{AO} = v\hat{i} - \omega r \hat{i}$$

$$\text{similarly } \vec{v}_B = \vec{v}_O + \vec{v}_{BO} = v\hat{i} - \omega r \hat{j}$$


$$\vec{v}_C = \vec{v}_O + \vec{v}_{CO} = v\hat{i} + \omega r \hat{i}$$

$$\vec{v}_D = \vec{v}_O + \vec{v}_{DO} = v\hat{i} + \omega r \hat{j}$$



## 9.2 Pure Rolling (or rolling without sliding) :


Pure rolling is a special case of general rotation of a rigid body with circular cross section (e.g. wheel, disc, ring, sphere) moving on some surface. Here, there is no relative motion between the rolling body and the surface of contact, at the point of contact

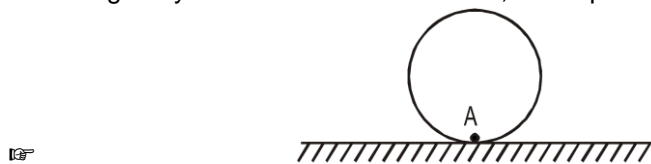

Here contact point is A & contact surface is horizontal ground. For pure rolling velocity of A w.r.t. ground = 0  $\Rightarrow V_A = 0$ .



From above figure, for pure rolling, velocity of A w.r.t. to plank is zero  $\Rightarrow V_A = V$ .

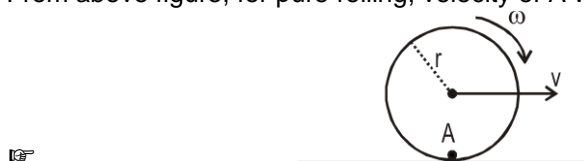

From above figure for, pure rolling, velocity of A w.r.t. ground is zero.


$$\Rightarrow v - \omega r = 0$$

$$v = \omega r$$

$$\text{Similarly } a = \alpha r$$

## Solved Examples

**Example 64.** A wheel of radius  $r$  rolls (rolling without slipping) on a level road as shown in figure.



**Solution :**

Find out velocity of point A and B

Contact surface is in rest for pure rolling velocity of point A is zero.

so  $v = \omega r$

velocity of point B  $= v + \omega r = 2v$



### 9.3 Dynamics of general motion of a rigid body :

This motion can be viewed as translation of centre of mass and rotation about an axis passing through centre of mass

If  $I_{CM}$  = Moment of inertia about this axis passing through COM

$\vec{\tau}_{cm}$  = Net torque about this axis passing through COM

$\vec{a}_{CM}$  = Acceleration of COM

$\vec{v}_{CM}$  = Velocity of COM

$\vec{F}_{ext}$  = Net external force acting on the system.

$\vec{P}_{system}$  = Linear momentum of system.

$\vec{L}_{CM}$  = Angular momentum about centre of mass.

$\vec{r}_{CM}$  = Position vector of COM w.r.t. point A.

then (i)  $\vec{\tau}_{cm} = I_{cm} \vec{\alpha}$

(ii)  $\vec{F}_{ext} = M \vec{a}_{cm}$

(iii)  $\vec{P}_{system} = M \vec{v}_{cm}$

(vi) Total K.E.  $= \frac{1}{2} M v_{cm}^2 + \frac{1}{2} I_{cm} \omega^2$

(v)  $\vec{L}_{CM} = I_{CM} \vec{\omega}$

(vi) Angular momentum about point A  $= \vec{L}$  about C.M. +  $\vec{L}$  of C.M. about A

$\vec{L}_A = I_{cm} \vec{\omega} + \vec{r}_{cm} \times M \vec{v}_{cm}$

$\frac{d\vec{L}_A}{dt} = \frac{d}{dt} (I_{cm} \vec{\omega} + \vec{r}_{cm} \times M \vec{v}_{cm}) \neq I_A \frac{d\vec{\omega}}{dt}$ . Notice that torque equation can be applied to a rigid body in a general motion only and only about an axis through centre of mass.

## Solved Examples


**Example 65.** A uniform sphere of mass 200 g rolls without slipping on a plane surface so that its centre moves at a speed of 2.00 cm/s. Find its kinetic energy.

**Solution :** As the sphere rolls without slipping on the plane surface, its angular speed about the centre is

$\omega = \frac{v_{cm}}{r}$ . The kinetic energy is

$$\begin{aligned}
 K &= \frac{1}{2} I_{cm} \omega^2 + \frac{1}{2} M v_{cm}^2 = \frac{1}{2} \cdot \frac{2}{5} M r^2 \omega^2 + \frac{1}{2} M v_{cm}^2 \\
 &= \frac{1}{5} M v_{cm}^2 + \frac{1}{2} M v_{cm}^2 = \frac{7}{10} M v_{cm}^2 = \frac{7}{10} (0.200 \text{ kg}) (0.02 \text{ m/s})^2 = 5.6 \times 10^{-5} \text{ J.}
 \end{aligned}$$

**Example 66.** A force  $F$  acts tangentially at the highest point of a sphere of mass  $m$  kept on a rough horizontal plane. If the sphere rolls without slipping, find the acceleration of the centre ( $C$ ) and point  $A$  and  $B$  of the sphere.

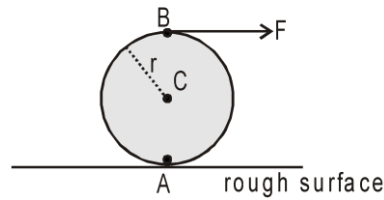

**Solution :** The situation is shown in figure. As the force  $F$  rotates the sphere, the point of contact has a tendency to slip towards left so that the static friction on the sphere will act towards right. Let  $r$  be the radius of the sphere and  $a$  be the linear acceleration of the centre of the sphere. The angular acceleration about the centre of the sphere is  $\alpha = a/r$ , as there is no slipping.

For the linear motion of the centre,

$$F + f = ma \quad \text{.....(i)}$$

and for the rotational motion about the centre,

$$Fr - f r = I \alpha = \left( \frac{2}{5} m r^2 \right) \left( \frac{a}{r} \right) \quad \text{or} \quad F - f = \frac{2}{5} m a, \quad \text{.....(iii)}$$

From (i) and (ii),


$$2F = \frac{7}{5} m a \quad \text{or} \quad a = \frac{10 F}{7 m}$$

Acceleration of point  $A$  is zero.

$$\text{Acceleration of point } B \text{ is } 2a = 2 \left( \frac{10 F}{7} \right)$$

**Example 67.** A circular rigid body of mass  $m$ , radius  $R$  and radius of gyration ( $k$ ) rolls without slipping on an inclined plane of a inclination  $\theta$ . Find the linear acceleration of the rigid body and force of friction on it. What must be the minimum value of coefficient of friction so that rigid body may roll without sliding?

**Solution.**

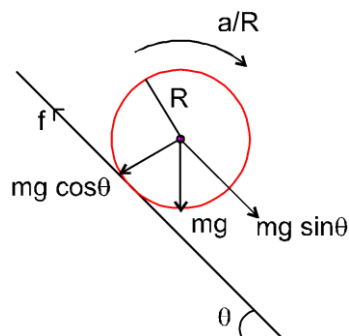

If  $a$  is the acceleration of the centre of mass of the rigid body and  $f$  the force of friction between sphere and the plane, the equation of translatory and rotatory motion of the rigid body will be.

$$m g \sin \theta - f = m a \quad \text{(Translatory motion)}$$

$$f R = I \alpha \quad \text{(Rotatory motion)}$$

$$\begin{aligned}
 f &= \frac{I\alpha}{R} \\
 I &= mk^2, \text{ due to pure rolling } a = \alpha R \\
 mg \sin \theta - \frac{I\alpha}{R} &= m\alpha R & mg \sin \theta &= m\alpha R + \frac{I\alpha}{R} \\
 mg \sin \theta &= m\alpha R + \frac{mk^2\alpha}{R} & mg \sin \theta &= ma + \frac{mk^2\alpha}{R} \\
 mg \sin \theta &= a \left[ \frac{R^2 + k^2}{R^2} \right] & a &= \left[ \frac{g \sin \theta}{\frac{R^2 + k^2}{R^2}} \right] & a &= \left[ \frac{g \sin \theta}{\left(1 + \frac{k^2}{R^2}\right)} \right] & f &= \frac{I\alpha}{R} \\
 f &= \frac{mk^2 a}{R^2} \Rightarrow \frac{mg k^2 \sin \theta}{R^2 + k^2} & f &\leq \mu N \\
 \frac{mk^2}{R^2} a &\leq \mu \leq \frac{mg \cos \theta}{\tan \theta} & \frac{k^2}{R^2} \times \frac{g \sin \theta}{(k^2 + R^2)} &\leq \mu g \cos \theta \\
 \mu &\geq \left[ \frac{1 + \frac{R^2}{k^2}}{\tan \theta} \right] & \mu_{\min} &= \left[ \frac{1 + \frac{R^2}{k^2}}{\tan \theta} \right]
 \end{aligned}$$

**Note :** From above example if rigid bodies are solid cylinder, hollow cylinder, solid sphere and hollow sphere.

(1) Increasing order of acceleration.

$$a_{\text{solid sphere}} > a_{\text{hollow sphere}} > a_{\text{solid cylinder}} > a_{\text{hollow cylinder}}$$

(2) Increasing order of required friction force for pure rolling.

$$f_{\text{hollow cylinder}} > f_{\text{hollow sphere}} > f_{\text{solid cylinder}} > f_{\text{solid sphere}}$$



(3) Increasing order of required minimum friction coefficient for pure rolling.

$$\mu_{\text{hollow cylinder}} > \mu_{\text{hollow sphere}} > \mu_{\text{solid cylinder}} > \mu_{\text{solid sphere}}$$



## 9.4 Instantaneous axis of rotation :

It is the axis about which the combined translational and rotational motion appears as pure rotational motion.

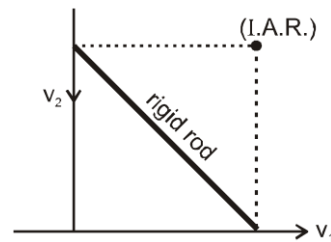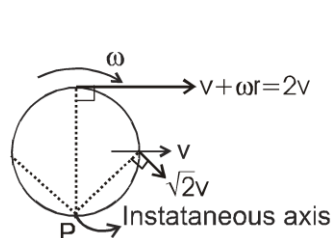

The combined effect of translation of centre of mass and rotation about an axis through the centre of mass is equivalent to a pure rotation with the same angular speed about a stationary axis ; this axis is called instantaneous axis of rotation. It is defined for an instant and its position changes with time.

eg. In pure rolling the point of contact with the surface is the instantaneous axis of rotation.

**Geometrical construction of instantaneous axis of rotation (I.A.R).** Draw velocity vector at any two points on the rigid body. The I.A.R. is the point of intersection of the perpendicular drawn on them.



In case of pure rolling the lower point is instantaneously axis of rotation.

The motion of body in pure rolling can therefore be analysed as pure rotation about this axis.

Consequently

$$\tau_P = I_P \alpha$$


$$\alpha_P = I_P \omega$$

$$K.E. = \frac{1}{2} I_P \omega^2$$

Where  $I_P$  is moment of inertial instantaneous axis of rotation passing through P.

## Solved Examples

Example 68.

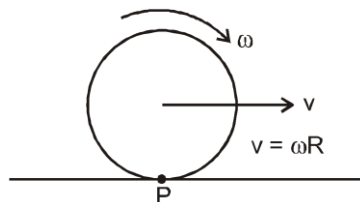

Prove that kinetic energy =  $\frac{1}{2} I_P \omega^2$

**Solution :**

$$K.E. = \frac{1}{2} I_{cm} \omega^2 + \frac{1}{2} M v_{cm}^2 = \frac{1}{2} I_{cm} \omega^2 + \frac{1}{2} M \omega^2 R^2$$

$$\frac{1}{2} (I_{cm} + MR^2) \omega^2 \Rightarrow \frac{1}{2} (I_{\text{contact point}}) \omega^2$$




Notice that pure rolling of uniform object equation of torque can also be applied about the contact point.




**The nature of friction in the following cases assume body is perfectly rigid**

(i)  $v = \omega R$




No friction and pure rolling.

(ii)  $v = \omega R$




No friction and pure rolling (If the body is not perfectly rigid, then there is a small friction acting in this case which is called rolling friction)

(iii)  $v > \omega R$  or  $v < \omega R$




No friction force but not pure rolling.

(iv)  $v > \omega R$

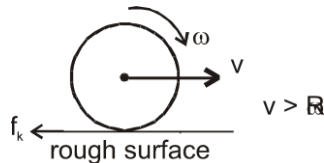


There is Relative Motion at point of contact so Kinetic Friction,  $f_k = \mu N$  will act in backward direction. This kinetic friction decrease  $v$  and increase  $\omega$ , so after some time  $v = \omega R$  and pure rolling will resume like in case (ii).

(v)  $v < \omega R$

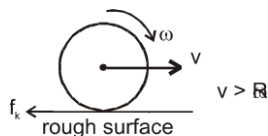


There is Relative Motion at point of contact so Kinetic Friction,  $f_k = \mu N$  will act in forward direction. This kinetic friction increase  $v$  and decrease  $\omega$ , so after some time  $v = \omega R$  and pure rolling will resume like in case (ii).

(vi)  $v = \omega R$  (initial)

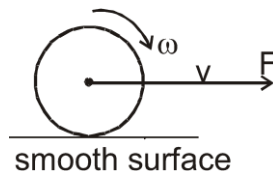

No friction and no pure rolling.


(vii)  $v = \omega R$  (initial)

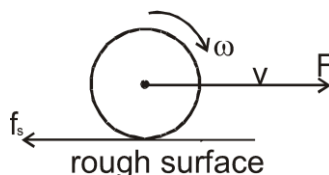

Static friction whose value can be lie between zero and  $\mu_s N$  will act in backward direction. If coefficient of friction is sufficiently high, then  $f_s$  compensates for increasing  $v$  due to  $F$  by increasing  $\omega$  and body may continue in pure rolling with increases  $v$  as well as  $\omega$ .

## Solved Examples

**Example 69.** A rigid body of mass  $m$  and radius  $r$  rolls without slipping on a rough surface. A force is acting on a rigid body  $x$  distance from the centre as shown in figure. Find the value of  $x$  so that static friction is zero.

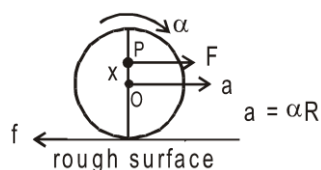

**Solution.** Torque about centre of mass

$$Fx = I_{cm} \alpha \dots\dots\dots (1)$$

$$F = ma \dots\dots\dots (2)$$


From eqn. (1) & (2)  
 $\max = I_{cm} \alpha$  ( $a = \alpha R$ )

$$x = \frac{I_{cm}}{mR}$$

**Note :-** For pure rolling if any friction is required then friction force will be statics friction. It may be zero, backward direction or forward direction depending on value of  $x$ . If  $F$  below the point P then friction force will act in backward direction or above the point P friction force will act in forward direction.

**Example 70.** A hollow sphere is projected horizontally along a rough surface with speed  $v$  and angular velocity

$\omega_0$  find out the ratio  $\frac{v}{\omega_0}$ . So that the sphere stop moving after some time.

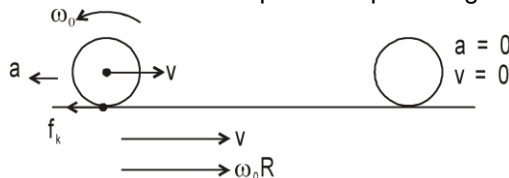

**Solution :** Torque about lowest point of sphere.

$$f_k \times R = I\alpha$$

$$\mu mg \times R = \frac{2}{3} mR^2 \alpha$$

$$\alpha = \frac{3\mu g}{2R}$$

angular acceleration in opposition direction of angular velocity.

$$\omega = \omega_0 - \alpha t \quad (\text{final angular velocity } \omega = 0)$$

$$\omega_0 = \frac{3\mu g}{2R} \times t \quad t = \frac{\omega_0 \times 2R}{3\mu g}$$

acceleration 'a =  $\mu g$ '

$$v_f = v - at \quad (\text{final velocity } v_f = 0)$$

$$v = \mu g \times t \quad t = \frac{v}{\mu g}$$

To stop the sphere time at which  $v$  &  $\omega$  are zero, should be same.

$$\frac{v}{\mu g} = \frac{2\omega_0 R}{3\mu g} = \frac{v}{\omega_0} = \frac{2R}{3}$$

**Example 71.** A cylinder is released from rest from the top of an incline of inclination  $\theta$  and length  $l$ . If the cylinder rolls without slipping, what will be its speed when it reaches the bottom ?

**Solution :** Let the mass of the cylinder be  $m$  and its radius  $r$ . Suppose the linear speed of the cylinder when it reaches the bottom is  $v$ . As the cylinder rolls without slipping, its angular speed about its axis is  $\omega = v/r$ . The kinetic energy at the bottom will be

$$K = \frac{1}{2} I\omega^2 + \frac{1}{2} mv^2 = \frac{1}{2} \left( \frac{1}{2} mr^2 \right) \omega^2 + \frac{1}{2} mv^2 = \frac{1}{4} mv^2 + \frac{1}{2} mv^2 = \frac{3}{4} mv^2.$$


This should be equal to the loss of potential energy  $mg \sin\theta$ . Thus,

$$\frac{3}{4} mv^2 = mg \sin\theta \quad \text{or} \quad v = \sqrt{\frac{4}{3} g l \sin\theta}$$

**Example 72.** A rod AB of mass  $2m$  and length  $l$  is lying on a horizontal frictionless surface. A particle of mass  $m$  traveling along the surface hits the end 'A' of the rod with a velocity  $v_0$  in a direction perpendicular to AB. The collision is elastic. After the collision the particle comes to rest. Find out after collision

(a) Velocity of centre of mass of rod (b) Angular velocity.

**Solution :** (a) Let just after collision the speed of COM of rod is  $v$  and angular velocity about COM is  $\omega$ .

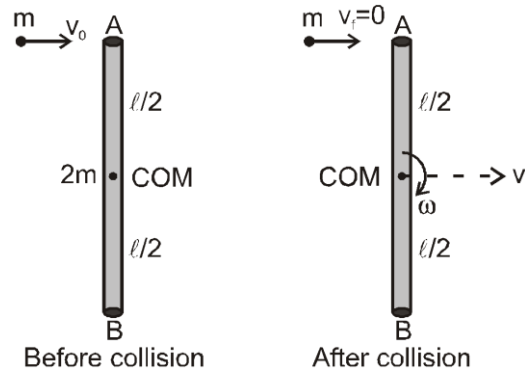

External force on the system (rod + mass) in horizontal plane is zero

Apply conservation of linear momentum in x direction

$$mv_0 = 2mv \quad \dots(1)$$

Net torque on the system about any point is zero

Apply conservation of angular momentum about COM of rod.


$$mv_0 \frac{\ell}{2} = I\omega \Rightarrow mv_0 \frac{\ell}{2} = \frac{2m\ell^2}{12} \omega$$

$$mv_0 = m\omega \frac{\ell}{3} \quad \dots(2)$$

From eq (1) velocity of centre of mass  $v = \frac{v_0}{2}$

From eq (2) angular velocity  $\omega = \frac{3v_0}{\ell}$

**Example 73.** Uniform & smooth Rod of length  $\ell$  is moving with a velocity of centre  $v$  and angular velocity  $\omega$  on smooth horizontal surface. Findout velocity of point A and B.




**Solution :** velocity of point A w.r.t. center is  $\omega \frac{\ell}{2}$

velocity of point A w.r.t. ground  $V_A = V + \omega \frac{\ell}{2}$

velocity of point B w.r.t. center is  $-\omega \frac{\ell}{2}$


velocity of point B w.r.t. ground  $V_B = V - \omega \frac{\ell}{2}$

**Example 74.** Find the moment of inertia of the uniform square plate of side 'a' and mass M about the axis AB.



**Solution :**  $dl = dm \frac{a^2}{3}$  ;  $I = \int dl = \frac{a^2}{3} \int dm = \frac{Ma^2}{3}$

**Example 75.** Find the moment of inertia of a uniform rectangular plate of mass  $M$ , edges of length ' $\ell$ ' and ' $b$ ' about its axis passing through centre and perpendicular to it.




**Solution :** Using perpendicular axis theorem  $I_3 = I_1 + I_2$


$$I_1 = \frac{Mb^2}{12}$$

$$I_2 = \frac{M\ell^2}{12}$$

$$I_3 = \frac{M(\ell^2 + b^2)}{12}$$




**Example 76.** Find the moment of inertia of a uniform square plate of mass  $M$ , edge of length ' $\ell$ ' about its axis passing through P and perpendicular to it.



$$I_P = \frac{M\ell^2}{6} + \frac{M\ell^2}{2} = \frac{2M\ell^2}{3}$$

**Solution :**

**Example 77.** Find out the moment of inertia of a ring having uniform mass distribution of mass  $M$  & radius  $R$  about an axis which is tangent to the ring and (i) in the plane of the ring (ii) perpendicular to the plane of the ring.



**Solution :**

(i) Moment of inertia about an axis passing through centre of ring and plane of the ring

$$I_1 = \frac{MR^2}{2}$$


$$\text{Using parallel axis theorem } I' = I_1 + MR^2 = \frac{3MR^2}{2}$$

(ii) Moment of inertia about an axis passing through centre of ring and perpendicular to plane of the ring

$$I_c = MR^2$$

$$\text{Using parallel axis theorem } I'' = I_c + MR^2 = 2MR^2$$

**Example 78.** Calculate the moment of inertia of a rectangular frame formed by uniform rods having mass  $m$  each as shown in figure about an axis passing through its centre and perpendicular to the plane of frame ? Also find moment of inertia about an axis passing through PQ ?

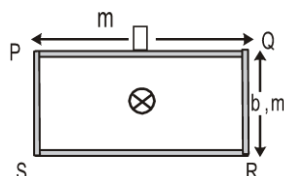

**Solution :** (i) Moment of inertia about an axis passing through its centre and perpendicular to the plane of frame

$$I_C = I_1 + I_2 + I_3 + I_4$$

$$I_1 = I_3, I_2 = I_4$$

$$I_C = 2I_1 + 2I_2$$

$$I_1 = \frac{m\ell^2}{12} + m\left(\frac{b}{2}\right)^2 \quad \Rightarrow \quad I_2 = \frac{mb^2}{12} + m\left(\frac{\ell}{2}\right)^2$$

$$\frac{2m}{3}(\ell^2 + b^2)$$

$$\text{so, } I_C =$$

(ii) M.I. about axis PQ of rod PQ  $I_1 = 0$

$$\text{M.I. about axis PQ of rod PS } I_2 = \frac{mb^2}{2}$$

$$\text{M.I. about axis PQ of rod QR } I_3 = \frac{mb^2}{2}$$

$$\text{M.I. about axis PQ of rod SR } I_4 = mb^2$$

$$I = I_1 + I_2 + I_3 + I_4 = \frac{5mb^2}{3}$$

**Example 79.** In the previous question, during the motion of particle from P to Q. Torque of gravitational force about P is :

(1) increasing


(2) decreasing

(3) remains constant

(4) first increasing then decreasing

**Solution :** Increasing because distance from point P is increasing.

**Example 80.** A uniform rod of mass  $m$  and length  $\ell$  can rotate in vertical plane about a smooth horizontal axis hinged at point H. Find angular acceleration  $\alpha$  of the rod just after it is released from initial position making an angle of  $37^\circ$  with horizontal from rest? Find force exerted by the hinge just after the rod is released from rest.



**Solution :** Torque about hinge =  $\tau_H = I \alpha$

$$mg \cos 37^\circ \frac{\ell}{2} = \frac{m\ell^2}{3} \alpha$$

$$\alpha = 6g / 5\ell$$

$$a_t = \alpha \frac{\ell}{2} = \frac{3g}{5}$$


$$mg \cos 37^\circ - N_1 = ma_t$$

$$N_1 = \frac{mg}{5}$$

angular velocity of rod is zero. so  $N_2 = mg \sin 37^\circ = 3mg/5$

$$N = \sqrt{N_1^2 + N_2^2} = \sqrt{\left(\frac{mg}{5}\right)^2 + \left(\frac{3mg}{5}\right)^2} = \frac{mg\sqrt{10}}{5}$$

**Example 81.** A uniform rod of length  $\ell$ , mass  $m$  is hung from two strings of equal length from a ceiling as shown in figure. Determine the tensions in the strings?

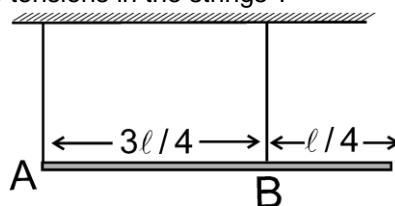


**Solution :**  $T_A + T_B = mg$  .....(i)

Torque about point A is zero

$$\text{So, } T_B \times \frac{3\ell}{4} = mg \times \frac{\ell}{2} \quad \text{.....(ii)}$$

From eq. (i) & (ii),  $T_A = mg/3$ ,  $T_B = 2mg/3$ .

**Example 82.** A uniform rod of mass  $m$  and length  $\ell$  can rotate freely on a smooth horizontal plane about a vertical axis hinged at point H. A point mass having same mass  $m$  coming with an initial speed  $u$  perpendicular to the rod, strikes the rod and sticks to it at a distance of  $3\ell/4$  from hinge point. Find out the angular velocity of the rod just after collision?



**Solution :** Angular Momentum about hinge  $L_i = L_f$

$$mu = \left(\frac{3\ell}{4}\right) \left(\frac{m\ell^2}{3} + m\left(\frac{3\ell}{4}\right)^2\right) \omega \Rightarrow \omega = \frac{36u}{43\ell}$$

**Example 83.** A cord is wound round the circumference of a wheel of radius  $r$ . The axis of the wheel is horizontal and moment of inertia about it is  $I$ . A weight  $mg$  is attached to end of the cord and falls from rest. After falling through a distance  $h$ , the angular velocity of the wheel will be.

**Solution.**  $mgh = (1/2) I\omega^2 + (1/2) mv^2 = (1/2) I\omega^2 + (1/2) mr^2\omega^2$  or  $2mgh = [I + mr^2]\omega^2$ ,  $\therefore \omega = \left[\frac{2mgh}{I + mr^2}\right]^{1/2}$


**Example 84.** A mass  $m$  is supported by a massless string wound round a uniform cylinder of mass  $m$  and radius  $R$ . On releasing the mass from rest, it will fall with acceleration

**Solution.**  $mgh = \frac{1}{2} mv^2 + \frac{1}{2} I\omega^2 = \frac{1}{2} mv^2 + \left[\frac{1}{2} mR^2\right] v^2/R^2 = \frac{3}{4} mv^2$

$$v = \sqrt{2ah} \quad [\because v^2 = u^2 + 2as] \quad \therefore mgh = \frac{3}{4} m \times 2ah \Rightarrow a = \frac{2}{3} g$$

**Example 85.** A hollow sphere of mass  $M$  and radius  $R$  as shown in figure slips on a rough horizontal plane. At

some instant it has linear velocity  $v_0$  and angular velocity about the centre  $\frac{v_0}{2R}$  as shown in figure. Calculate the linear velocity after the sphere starts pure rolling.

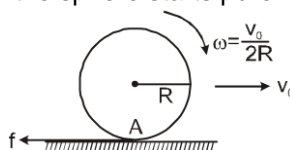

**Solution :**

Velocity of the centre =  $v_0$  and the angular velocity about the centre =  $\frac{v_0}{2R}$ . Thus  $v_0 > \omega_0 R$ . The sphere slips forward and thus the friction by the plane on the sphere will act backward. As the friction is kinetic, its value is  $\mu N = \mu Mg$  and the sphere will be decelerated by  $a_{cm} = f/M$ . Hence,

$$v(t) = v_0 - \frac{f}{M} t. \quad \text{.....(i)}$$

This friction will also have a torque =  $fr$  about the centre. This torque is clockwise and in the direction of  $\omega_0$ . Hence the angular acceleration about the centre will be

$$\alpha = \frac{R}{(2/3)MR^2} = \frac{3f}{2MR}$$

and the clockwise angular velocity at time  $t$  will be  $\omega(t) = \omega_0 + \alpha t = \frac{v_0}{2R} + \frac{3f}{2MR} t$

Pure rolling starts when  $v(t) = R\omega(t)$  i.e.,  $v(t) = \frac{v_0}{2} + \frac{3f}{2M} t$  .....(ii)

Eliminating  $t$  from (i) and (ii),  $\frac{3}{2} v(t) + v(t) = \frac{3}{2} v_0 + \frac{v_0}{2}$  or  $v(t) = \frac{2}{5} \times 2v_0 = \frac{4}{5} v_0$ .

Thus, the sphere rolls with linear velocity  $4v_0/5$  in the forward direction.